




TCT7520-16

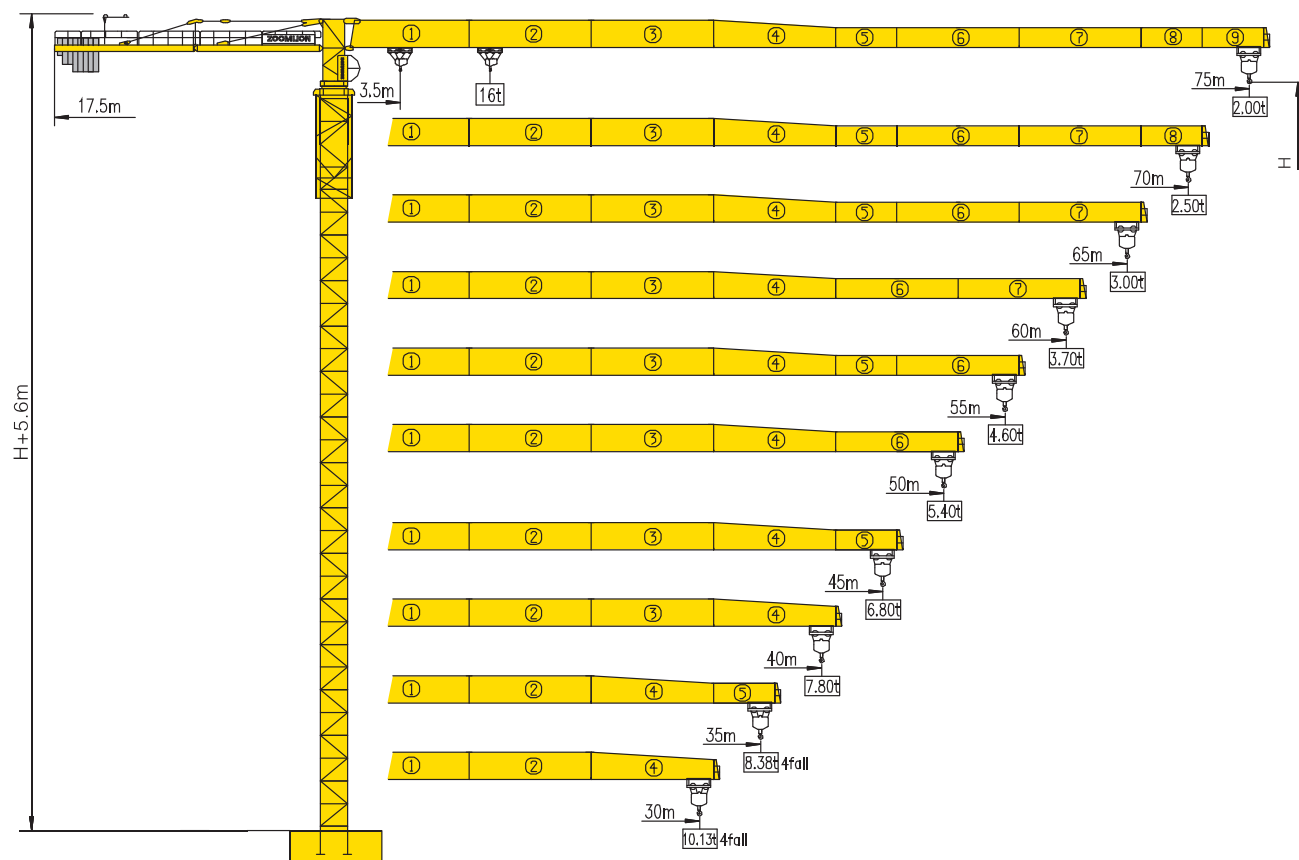

Counter-jib ballast

		(Kg)	PHZ3500	PHZ2500
75m	17.5m	26000	6	2
70m	17.5m	25000	5	3
65m	17.5m	24000	4	4
60m	17.5m	22500	5	2
55m	17.5m	21500	4	3
50m	17.5m	20000	5	1
45m	17.5m	19000	4	2
40m	17.5m	17500	5	0
35m	17.5m	14000	4	0
30m	17.5m	13000	3	1


Working Height(m) @ Wall-tie Location(m)

Model Detail	Mast Code	Wall-tie #1	Wall-tie #2	Wall-tie #3	Wall-tie #4	Wall-tie #5	Wall-tie #6
TCT7520-16D	L68B1	87 @ 47	111 @ 74	138 @ 101	165 @ 128	192 @ 155	216 @ 182




Masts Reactions

TCT7520-16D

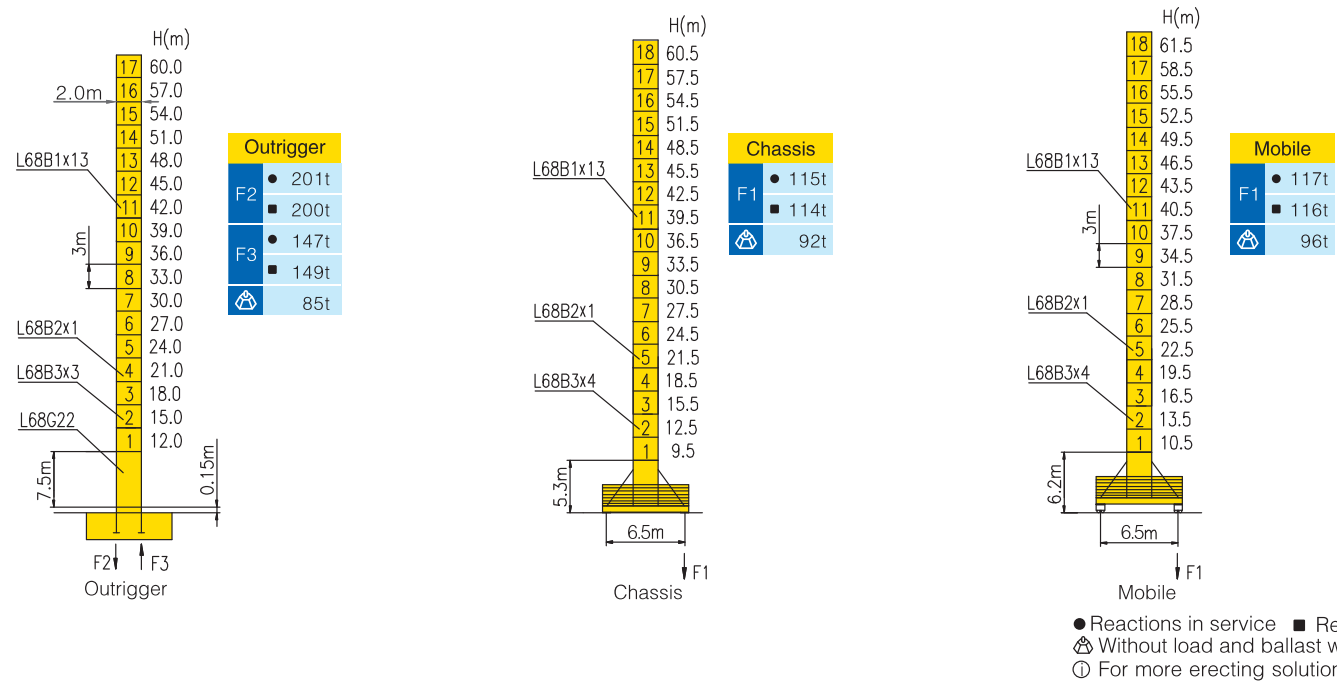

Anchorage

TCT7520-16D

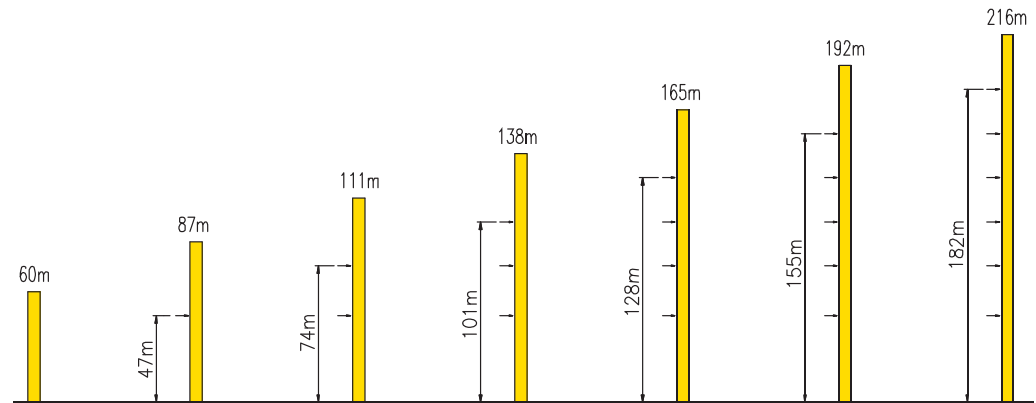

TCT7520-16



Load diagrams

		Max.Capacity m/t	3.5~12.5	15	20	25	30	35	40	45	50	55	60	65	70	75
75m (R=75.75)	⌋	3.5—25.4m 8t	8.00				6.57	5.47	4.64	4.01	3.50	3.09	2.75	2.46	2.21	2.00
	⌋⌋	3.5—13.4m 16t	16.00	13.94	9.82	7.43	5.86	4.75	3.93	3.29	2.78	2.37	2.03	1.74	1.49	1.28
70m (R=71.75)	⌋	3.5—27.6m 8t	8.00				7.26	6.05	5.15	4.46	3.91	3.46	3.08	2.77	2.50	
	⌋⌋	3.5—14.5m 16t	16.00	15.36	10.87	8.25	6.54	5.33	4.43	3.74	3.19	2.74	2.37	2.05	1.78	
65m (R=66.75)	⌋	3.5—29.3m 8t	8.00				7.77	6.48	5.53	4.79	4.21	3.73	3.33	3.00		
	⌋⌋	3.5—15.3m 16t	16.00		11.64	8.87	7.05	5.77	4.81	4.08	3.49	3.01	2.62	2.28		
60m (R=61.75)	⌋	3.5—31.7m 8t	8.00					7.12	6.08	5.28	4.65	4.13	3.70			
	⌋⌋	3.5—16.6m 16t	16.00		12.78	9.77	7.79	6.40	5.37	4.57	3.93	3.41	2.98			
55m (R=56.75)	⌋	3.5—34.5m 8t	8.00					7.87	6.73	5.86	5.17	4.60				
	⌋⌋	3.5—18.0m 16t	16.00		14.12	10.82	8.67	7.15	6.02	5.14	4.45	3.88				
50m (R=51.75)	⌋	3.5—18.6m 16t	8.00						7.03	6.12	5.40					
	⌋⌋	3.5—35.8m 8t	16.00		14.72	11.30	9.06	7.48	6.31	5.40	4.68					
45m (R=46.75)	⌋	3.5—39.1m 8t	8.00						7.79	6.80						
	⌋⌋	3.5—20.3m 16t	16.00			12.55	10.10	8.36	7.07	6.08						
40m (R=41.75)	⌋	3.5—39.1m 8t	8.00						7.80							
	⌋⌋	3.5—20.3m 16t	16.00			12.56	10.10	8.37	7.08							
35m (R=36.75)	⌋	3.5—35.0m 8t	8.00													
	⌋⌋	3.5—20.4m 16t	16.00			12.57	10.12	8.38								
30m (R=31.75)	⌋	3.5—30.0m 8t	8.00													
	⌋⌋	3.5—20.4m 16t	16.00			12.59	10.13									



Mechanisms

			Hoisting QE1675E					
	Slewing	HVV145B1.130A HVV145B2.130A		V			4t	75 m/min
		0 ~ 0.6 r/min	2 × 145 N.m		60/60 kW			
	Trolleying	BP110A		IV			8t	37.5 m/min
		0 ~ 100 m/min	11 kW		600m ① (6 layers)			
	Travelling	ZAH52A–D ZCH52A–D		IV		8t	37.5 m/min	
		0 ~ 25m/min	4 × 5.2 kW			16t	18.75 m/min	
			① Consult us If overtop					
			380V(+10%–10%) 50Hz		86+4 × 5.2 kW			

For more mechanisms optional, consult us!