




# Hiab 335 K

## Range 26–29 tm

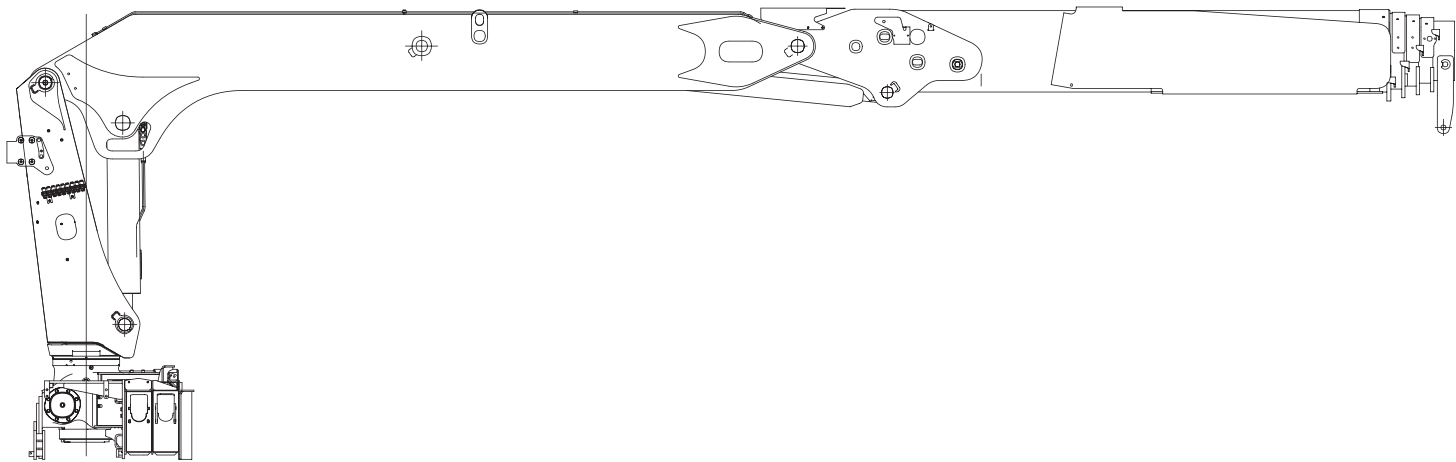


Basic data



# Hiab 335 K Basic data

| Technical data                                    | K-4 CLX     | K-4 HiPro   | K-4 Pro     |
|---------------------------------------------------|-------------|-------------|-------------|
| Max. lifting capacity (kNm)                       | 261         | 283         | 261         |
| Outreach, hydraulic extensions (m)                | 18.1        | 18.1        | 18.1        |
| Outreach, manual extensions (m)                   | 0           | 0           | 0           |
| Outreach / lifting capacity (m/kg)                | 7.7 / 3400  | 7.7 / 3750  | 7.7 / 3400  |
|                                                   | 10.1 / 2400 | 10.1 / 2650 | 10.1 / 2400 |
|                                                   | 12.6 / 1820 | 12.6 / 2000 | 12.6 / 1820 |
|                                                   | 14.9 / 1480 | 14.9 / 1640 | 14.9 / 1480 |
|                                                   | 17.3 / 1250 | 17.3 / 1380 | 17.3 / 1250 |
| Slewing angle (°)                                 | 460         | 460         | 460         |
| Height in folded position (mm)                    | 2825        | 2825        | 2825        |
| Width in folded position (mm)                     | 2500        | 2500        | 2500        |
| Installation space needed (mm)                    | 1142        | 1142        | 1142        |
| Weight, "standard" crane without stabilisers (kg) | 4646        | 4674        | 4630        |
| Weight, stabilizer equipment (kg)                 | 660         | 660         | 660         |

## Hiab 335 K-4 HiPro

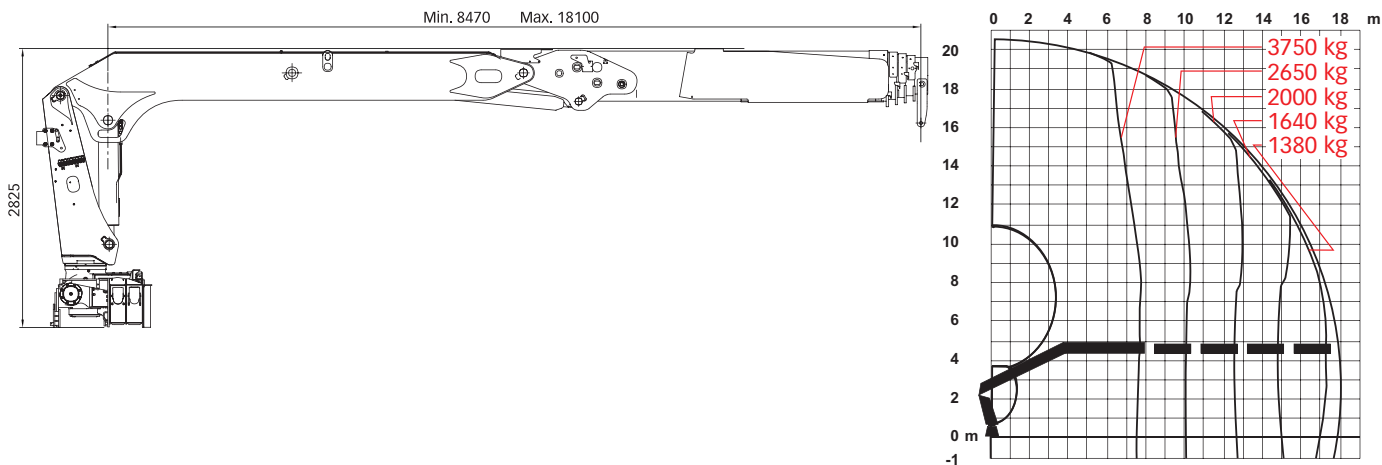

**Disclaimer** Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE-marked and comply with the European Standard EN 12999.

**Hiab** is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck-mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally. [www.hiab.com](http://www.hiab.com)

Hiab is part of Cargotec. [www.cargotec.com](http://www.cargotec.com)

