



Hiab XS 211

Range 19-21 tm



Basic data



Hiab XS 211 Basic data



Technical data	EP-5 Duo	EP-5 HiDuo	E-6 HiDuo
Max lifting capacity (kNm)	172	183	179
Outreach - hydraulic extensions (m)	15.1	15.1	16.6
Outreach / lifting capacity (m / kg)	2.7 / 6500	2.7 / 6900	2.5 / 7100
	4.7 / 3750	4.7 / 3950	4.5 / 4050
	6.5 / 2520	6.5 / 2700	6.1 / 2800
	8.4 / 1840	8.4 / 1980	8.0 / 1980
	10.5 / 1400	10.5 / 1500	9.9 / 1500
	12.7 / 1120	12.7 / 1200	12.0 / 1180
	15.0 / 940	15.0 / 1020	14.2 / 960
	-	-	16.5 / 820
Slewing angle	410°	410°	410°
Height in folded position (mm)	2386	2386	2386
Width in folded position (mm)	2500	2500	2500
Installation space needed (mm)	1060	1060	1085
Weight - "standard" crane without stabilizers (kg)	2690	2700	2840
Weight - stabilizer equipment (kg)	340 - 402	340 - 402	340 - 402

Technical data	EP-4 HiPro	EP-5 HiPro	E-6 HiPro	E-6 HiPro*	E-8 HiPro
Max lifting capacity (kNm)	193	176	173	173	158
Outreach - hydraulic extensions (m)	12.7	15.1	16.6	24.7	21.0
Outreach / lifting capacity (m / kg)	2.5 / 7400	2.7 / 7100	2.5 / 7200	2.4 / 7500	2.6 / 6700
	4.6 / 4300	4.7 / 4100	4.5 / 4200	4.5 / 4000	4.7 / 3600
	6.4 / 2960	6.5 / 2800	6.1 / 2920	6.1 / 2680	6.3 / 2380
	8.3 / 2200	8.4 / 2060	8.0 / 2080	7.9 / 1880	8.1 / 1600
	10.4 / 1700	10.5 / 1580	9.9 / 1580	9.8 / 1380	10.0 / 1100
	12.6 / 1400	12.7 / 1260	12.0 / 1240	11.8 / 1060	12.0 / 800
	-	15.0 / 1060	14.2 / 1000	13.9 / 860	14.1 / 580
	-	-	16.5 / 860	16.1 / 720	16.3 / 450
	-	-	-	-	18.6 / 370
	-	-	-	-	20.9 / 320
Outreach / lifting capacity, with jib (m / kg)	-	-	-	19.1 / 140	-
	-	-	-	20.8 / 110	-
	-	-	-	22.7 / 90	-
	-	-	-	24.6 / 80	-
Slewing angle	410°	410°	410°	410°	410°
Height in folded position (mm)	2386	2385	2385	2666	2385
Width in folded position (mm)	2500	2500	2500	2500	2500
Installation space needed (mm)	1060	1162	1192	1240	1247
Weight - "standard" crane without stabilizers (kg)	2630	2760	2900	3380**	3520
Weight - stabilizer equipment (kg)	340 - 402	334 - 422	334 - 422	334 - 422	334 - 422
Weight - jib (kg)	-	-	-	450	-

* All XS 211 ordered with a jib are equipped with an extra sturdy outer boom system.

** Jib 45X-3 excluded.



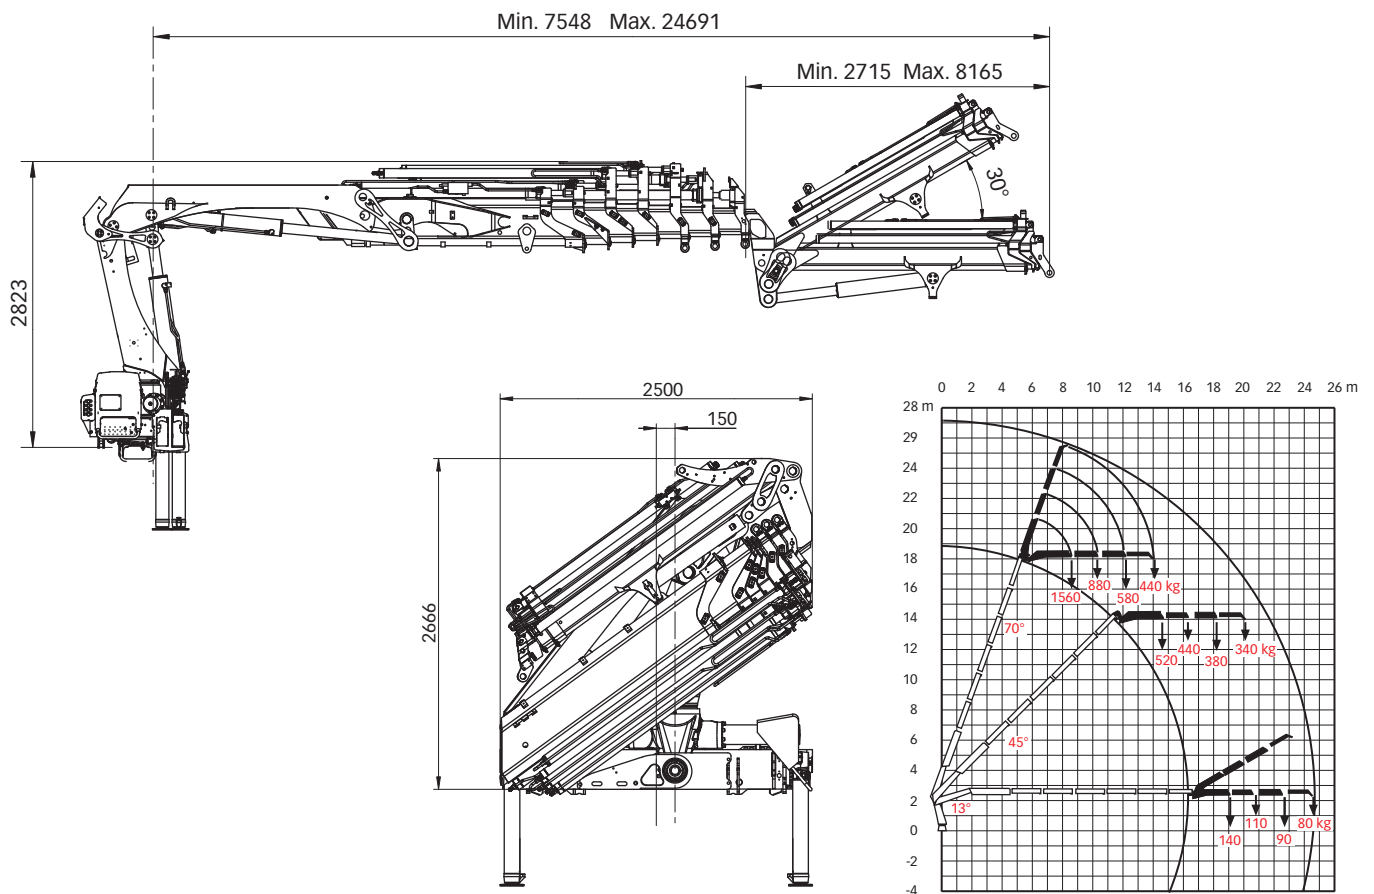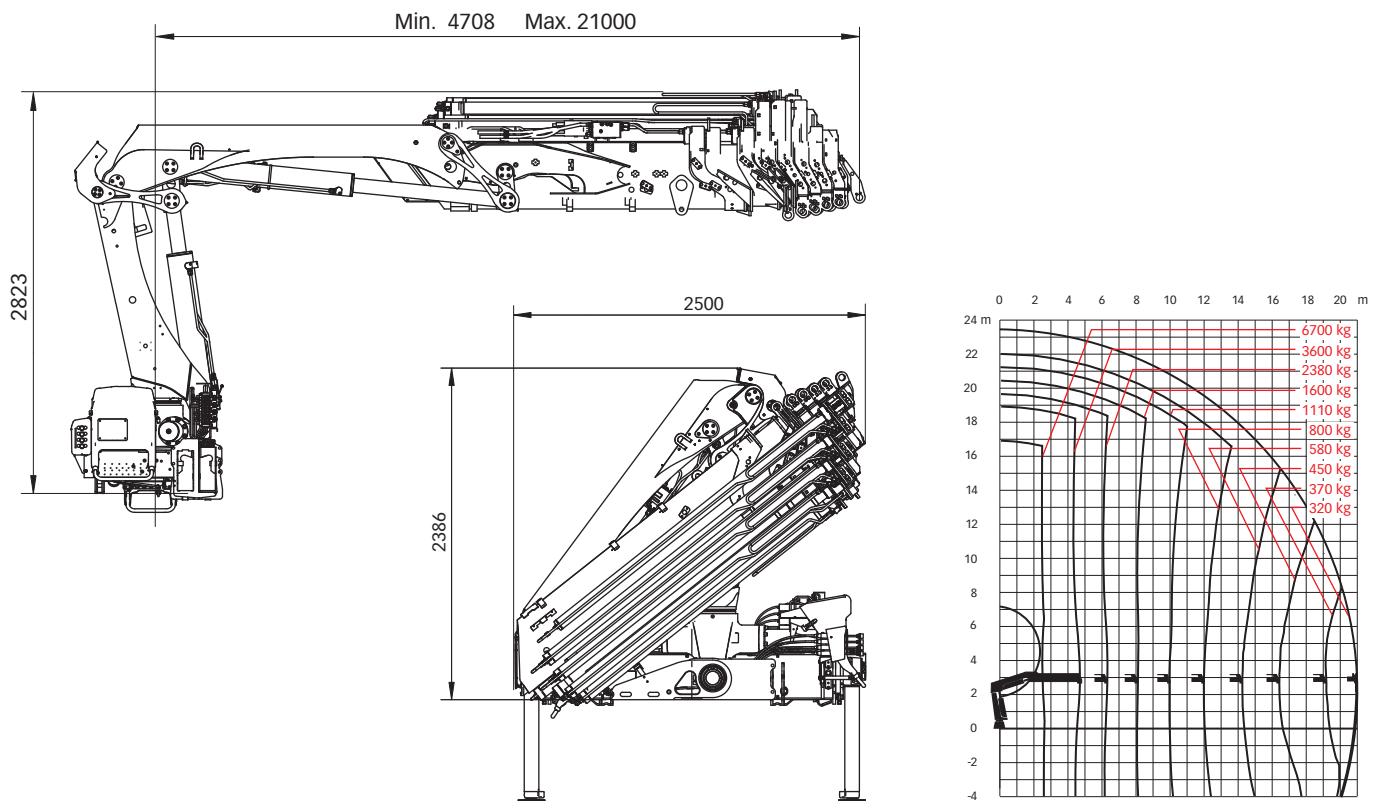



Atlas Polar
IT'S ALL ABOUT QUALITY™

Atlas Polar Company Ltd.
60 Northline Road
Toronto, ON M4B 3E5
Canada
1-888-799-4422
info@atlaspolars.com
www.atlaspolars.com