



## Hydraulic Crawler Crane

# CKS

# 1100


Model : CKS1100

Max. Lifting Capacity: **110 t x 3.6 m \***

Max. Crane Boom Length: **70.1 m**

Max. Fixed Jib Combination: **61.0 m + 21.3 m**

\* Auxiliary sheave is necessary.

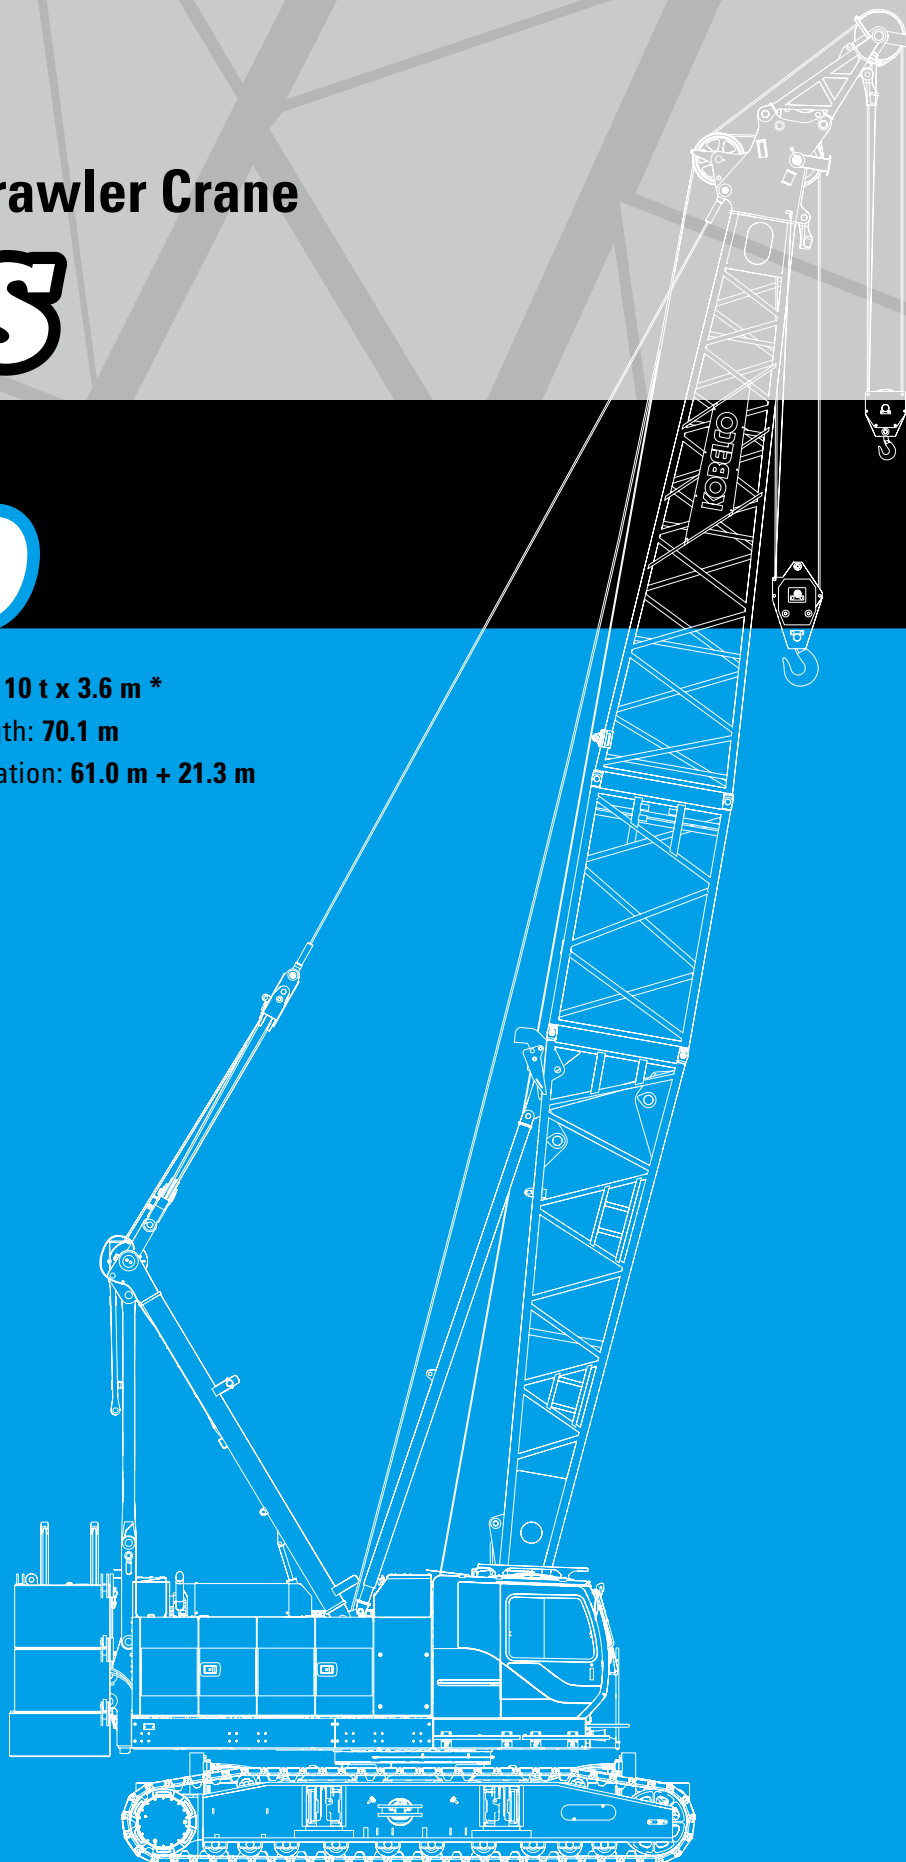

# KOBELCO





# CKS1100

## CONTENTS

3	SPECIFICATIONS
5	GENERAL DIMENSIONS
6	BOOM AND JIB ARRANGEMENTS
7	WORKING RANGES
10	SUPPLEMENTAL DATA
11	LIFTING CAPACITIES
16	SUPPLEMENTAL DATA FOR CLAMSHELL
17	LIFTING CAPACITIES
18	SUPPLEMENTAL DATA FOR REDUCED WEIGHTS
19	LIFTING CAPACITIES
20	SUPPLEMENTAL DATA FOR BARGE
21	LIFTING CAPACITIES
22	TRANSPORTATION PLAN
25	PARTS AND ATTACHMENTS



# SPECIFICATIONS



## Power Plant

**Model:** HINO J08E-VM  
**Type:** 4 cycle, water-cooled, vertical in-line 6, direct injection, turbo-charger, intercooler  
**Displacement:** 7,684 liters  
**Rated power:** 213 kW/2,100 min<sup>-1</sup>  
**Max. Torque:** 1,017 N·m/1,600 min<sup>-1</sup>  
**Cooling System:** Water-cooled  
**Starter:** 24V-5kW  
**Radiator:** Corrugated type core, thermostatically controlled  
**Air cleaner:** Dry type with replaceable paper element  
**Throttle:** Twist grip type hand throttle, electrically actuated  
**Fuel filter:** Replaceable paper element  
**Batteries:** Two 12V x 136 Ah/5HR capacity batteries, series connected  
**Fuel tank capacity:** 400 liters



## Hydraulic System

**Main pumps:** 4 variable displacement piston pumps  
**Control:** Full-flow hydraulic control system for infinitely variable pressure to all winches, propel and swing. Controls respond instantly to the touch, delivering smooth function operation.  
**Cooling:** Oil-to-air heat exchanger (plate-fin type)  
**Filtration:** Full-flow and bypass type with replaceable element  
**Max. relief valve pressure:**  
**Load hoist, boom hoist and propel system:** 31.9 MPa  
**Swing system:** 27.5 MPa  
**Control system:** 5.4 MPa  
**Hydraulic Tank Capacity:** 535 liters



## Boom Hoisting System

Powered by a hydraulic motor through a planetary reducer.  
**Brake:** A spring-set, hydraulically released multiple-disc brake is mounted on the boom hoist motor and operated through a counter-balance valve.  
**Drum Lock:** External ratchet for locking drum  
**Drum:** Single drum, grooved for 20 mm dia. wire rope  
**Line Speed:** Single line on first drum layer  
**Hoisting/Lowering:** 48 to 2 m/min  
**Boom hoisting/lowering:** 20mm x 155 m  
**Boom guy line:** 34 mm  
**Boom backstops:** Required for all boom length



## Load Hoisting System

Front and rear drums for load hoist powered by a hydraulic variable plunger motors, driven through planetary reducers.  
**Negative Brake:** A spring-set, hydraulically released multiple-disc brake is mounted on the hoist motor and operated through a counter-balance valve. (Positive free fall brake is optional)

**Drum Lock:** External ratchet for locking drum

### Drums:

#### Front Drums:

614 mm P.C.D x 617 mm wide drum, grooved for 26 mm wire rope. Rope capacity is 265 m working length and 360 m storage length.

**Rear Drum:** 614 mm P.C.D x 617 mm, grooved for 26 mm wire rope. Rope capacity is 235 m working length and 360 m storage length.

### Diameter of wire rope

**Main winch:** 26 mm x 265 m

**Aux. winch:** 26 mm x 235 m

**Third winch:** 26 mm x 190 m

### Line Speed\*:

**Hoisting/lowering:** 120 to 3 m/min

### Line Pull:

**Max. Line Pull\*:** 208 kN {21.2 tf}  
(Referential performance)

**Rated Line Pull:** 108 kN {11.0 tf}

\*Single line on first drum layer



## Swing System

Swing unit is powered by hydraulic motor driving spur gears through planetary reducer, the swing system provides 360° rotation.

**Swing parking brakes:** A spring-set, hydraulically released multiple-disc brake is mounted on swing motor.

**Swing circle:** Single-row ball bearing with an integral internally cut swing gear.

**Swing lock:** Manually, four position lock for transportation

**Swing Speed:** 3.2 min<sup>-1</sup> (rpm)



## Upper Structure

Torsion-free precision machined upper frame. All components are located clearly and service friendly. Engine will with low noise level.

**Counterweight:** 34.6 ton



## Cab & Control

Totally enclosed, full vision cab with safety glass, fully adjustable, high backed seat with a headrest and armrests, and intermittent wiper and window washer (skylight and front window).

### Cab fittings:

Air conditioner, convenient compartment (for tool), cup holder, cigarette lighter, sun visor, roof blind, tinted glass, floor mat, footrest, and shoe tray



Lower Structure

Steel-welded carbody with axles. Crawler assemblies can be hydraulically extended for wide-track operation or retracted for transportation. Crawler belt tension is maintained by hydraulic jack force on the track-adjusting bearing block.

**Carbodyweight:** 6.5 ton

**Crawler drive:** Independent hydraulic propel drive is built into each crawler side frame. Each drive consists of a hydraulic motor propelling a driving tumbler through a planetary gear box. Hydraulic motor and gear box are built into the crawler side frame within the shoe width.

**Crawler brakes:** Spring-set, hydraulically released parking brakes are built into each propel drive.

**Steering mechanism:** A hydraulic propel system provides both skid steering (driving one track only) and counter-rotating steering (driving each track in opposite directions).

**Track rollers:** Sealed track rollers for maintenance-free operation.

**Shoe (flat):** 900 mm wide each crawler

**Max. gradeability:** 40%



Weight

Including upper and lower machine, 34.6 ton counterweight and 6.5 ton carbody weight, basic boom (or basic boom + basic jib), hook, and other accessories.

**Weight:** 102 ton

**Ground pressure:** 95.4 kPa



Attachment

**Boom & Jib:**

Welded lattice construction using tubular, high-tensile steel chords with pin connection between sections.

Boom and Jib length

	Min. Length (Min. combination)	Max. Length (Max. combination)
Crane Boom	15.2 m	70.1 m
Fixed Jib	27.4 m + 9.1 m	61.0 m + 21.3 m

Main Specifications (Model: CKS1100)

Crane Boom	
Max. Lifting Capacity	110 t x 3.6 m *3
Max. Length	70.1 m
Fixed Jib	
Max. Lifting Capacity	10.9 t x 22.0 m
Max. Combination	61.0 m + 21.3 m
Main & Aux. Winch	
Max. Line Speed (1st layer)	120 m/min
Rated Line Pull (Single line)	108 kN {11.0 tf}
Wire Rope Diameter	26 mm
Wire Rope Length	265m (Main), 235 m (Aux.)
Brake Type (free fall)	Wet-type multiple disc brake (Optional)
Working Speed	
Swing Speed	3.2 min <sup>-1</sup> {rpm}
Travel Speed	1.4/1.0 km/h
Power Plant	
Model	HINO J08E-VM
Engine Output	213 kW/2,100min <sup>-1</sup>
Fuel Tank	400 liters

Hydraulic System	
Main Pumps	4 variable displacement
Max. Pressure	31.9 MPa {325 kgf/cm <sup>2</sup> }
Hydraulic Tank Capacity	535 liters
Self-Removal Device	
	counterweight/crawler self-removal device
Weight	
Operating Weight	102 t *1
Ground Pressure	95.4 kPa
Counterweight	34,600 kg
Transport Weight	57,410 kg *2

Units are SI units. { } indicates conventional units.

Line speeds in table are for light loads. Line speed varies with load.


\*1 Including upper and lower machine, 34.6 ton counterweight, 6.5 ton carbody weight, basic boom, hook, and other accessories.

\*2 Base machine with boom base, gantry, crawlers, and wire ropes (front/boom hoist)

\*3 Auxiliary sheave is must.


# GENERAL DIMENSIONS

(Unit: mm)

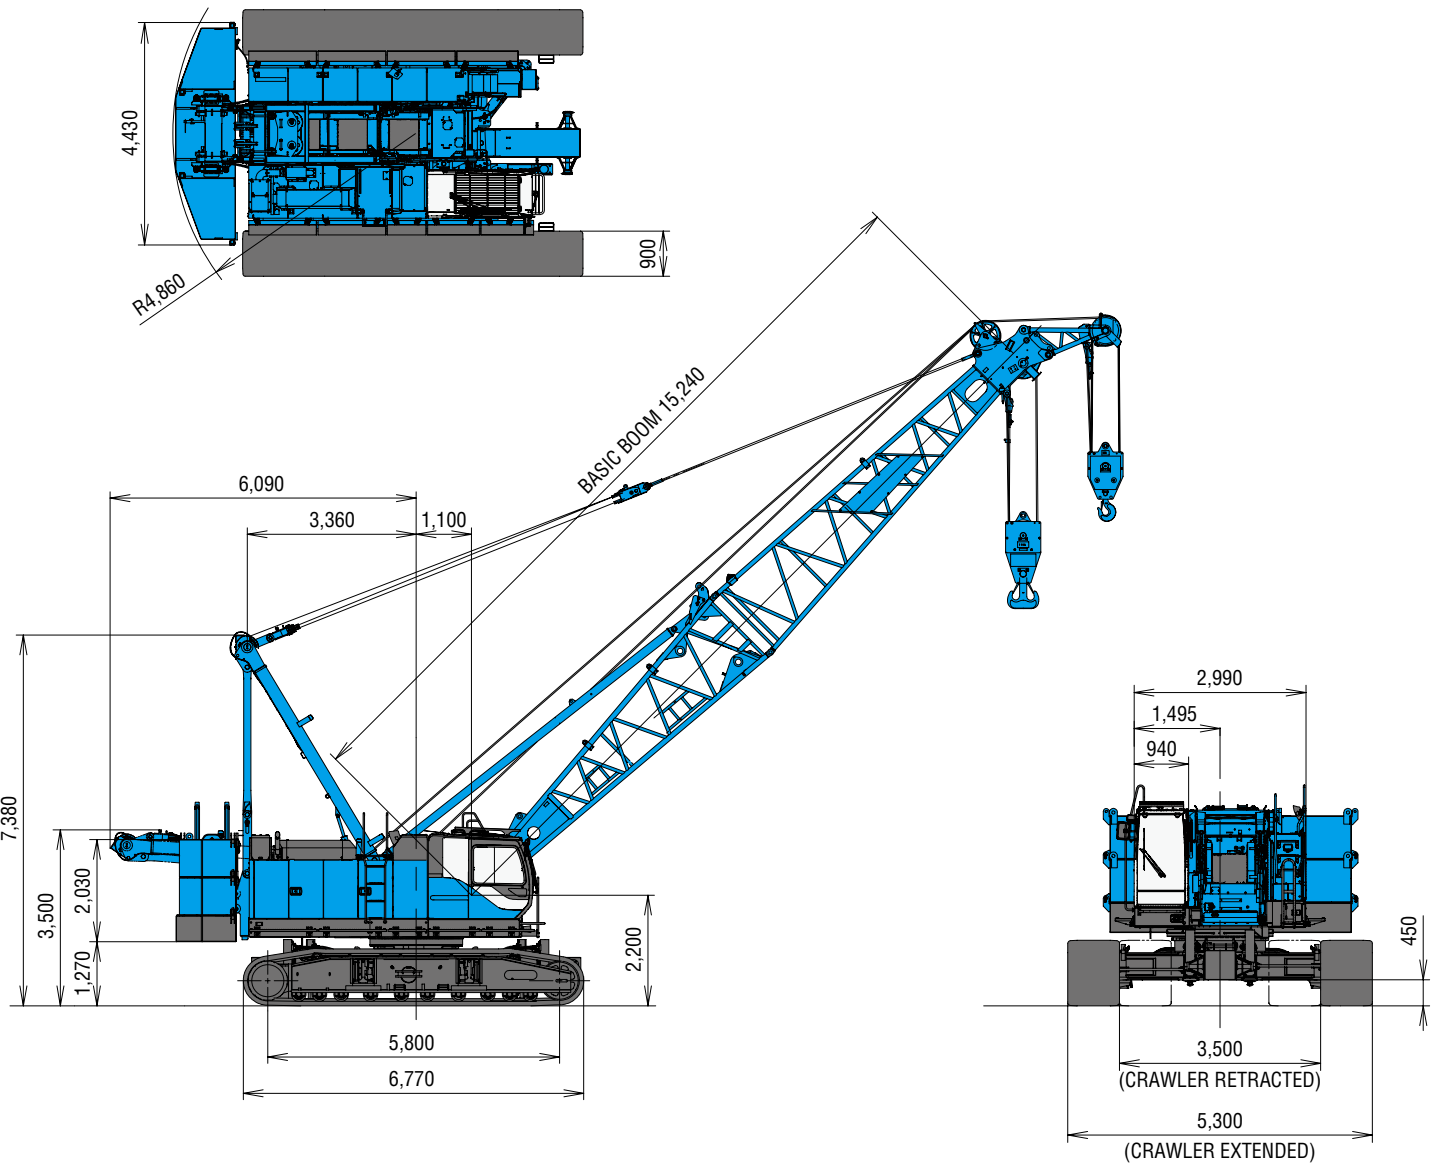


This catalog may contain photographs of machines with specifications, attachments and optional equipment.

## Limit of Hook Lifting

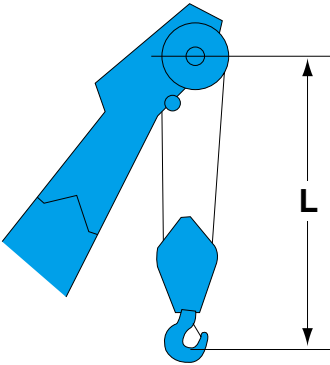











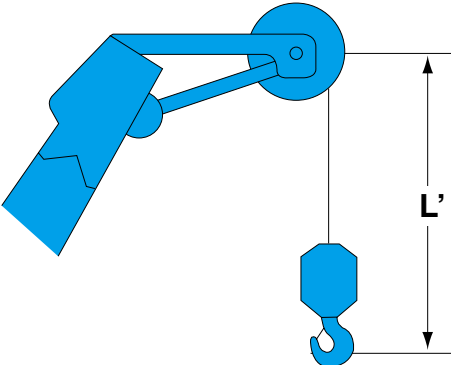











Hook	L
110 t hook	4.2 m
70 t hook	4.1 m
35 t hook	3.9 m























Hook	L'
Ball hook	3.6 m
35 t hook	3.9 m

# BOOM AND JIB ARRANGEMENTS

## Crane Boom Arrangements


Boom length m (ft)	Boom arrangement
15.2 (50)	
18.3 (60)	※ 
21.3 (70)	※  
24.4 (80)	※ 
27.4 (90)	※   
30.5 (100)	※  
33.5 (110)	※   
36.6 (120)	※ 
39.6 (130)	※   
42.7 (140)	※  
45.7 (150)	※   






Boom length m (ft)	Boom arrangement
48.8 (160)	※ 
51.8 (170)	※   
54.9 (180)	※  
57.9 (190)	※   
61.0 (200)	※ 
64.0 (210)	※  
67.1 (220)	※ 
70.1 (230)	※ 

Symbol	Boom Length	Remarks
	7.6 m	Boom Base
	7.6 m	Boom Top
	3.0 m	Insert Boom
	6.1 m	Insert Boom
	12.2 m	Insert Boom
	12.2 m	Insert Boom with lug

- ↗ mark shows the boom insert with lug attached and the guy line installing position when the fixed jib is used.
- ※ mark shows the standard boom arrangement which make the boom arrangement of less than the each boom length possible.
- mark shows the installing of the cable roller for the insert boom.

## Fixed Jib Arrangements

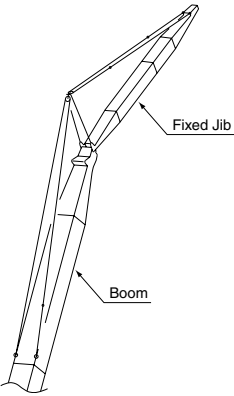


Crane boom length	Jib length m (ft)	Jib arrangement
27.4 m ~ 61.0 m	9.1 (30)	
	12.2 (40)	
	15.2 (50)	
	18.3 (60)	
	21.3 (70)	

Symbol	Jib Length	Remarks
	4.6 m	Jib Base
	4.6 m	Jib Top
	3.0 m	Insert Jib
	6.1 m	Insert Jib

# WORKING RANGES


## Crane Boom

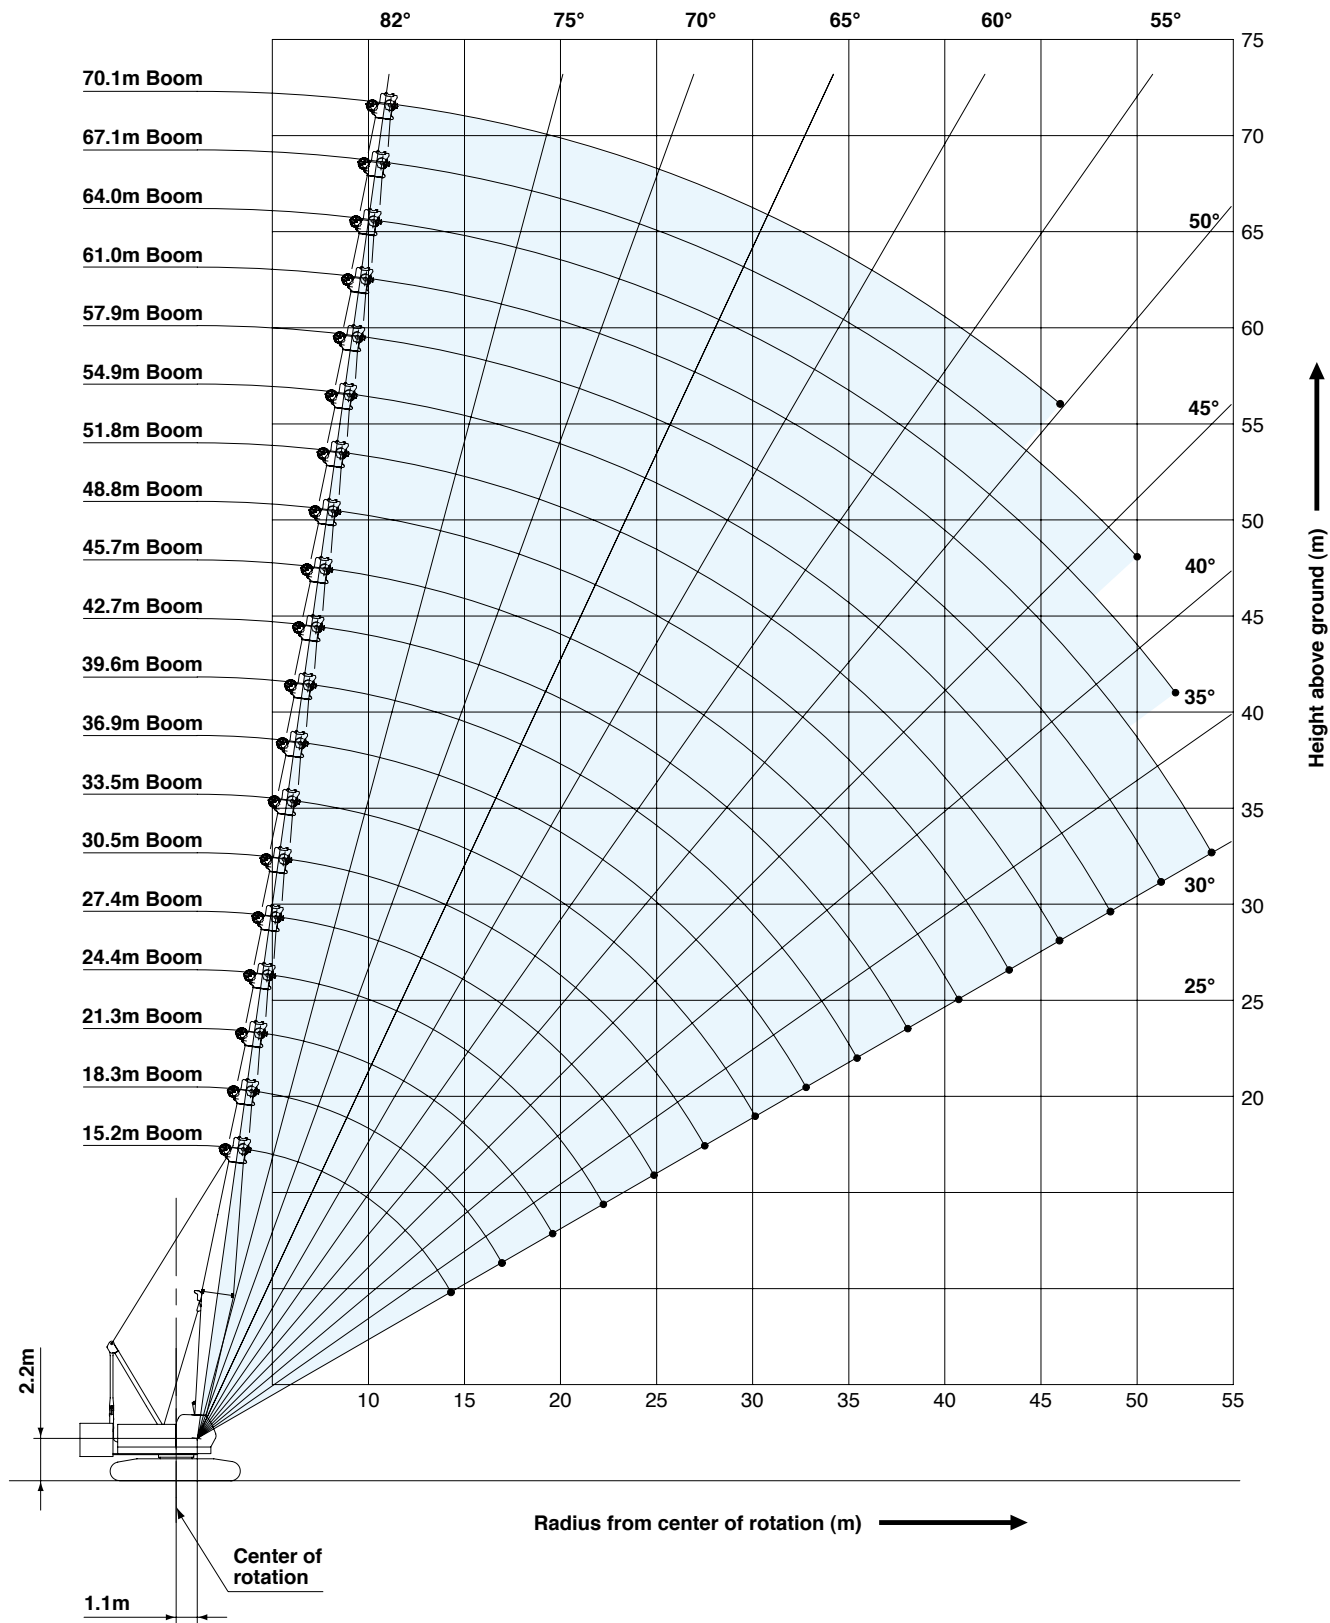






# Fixed Jib 10°

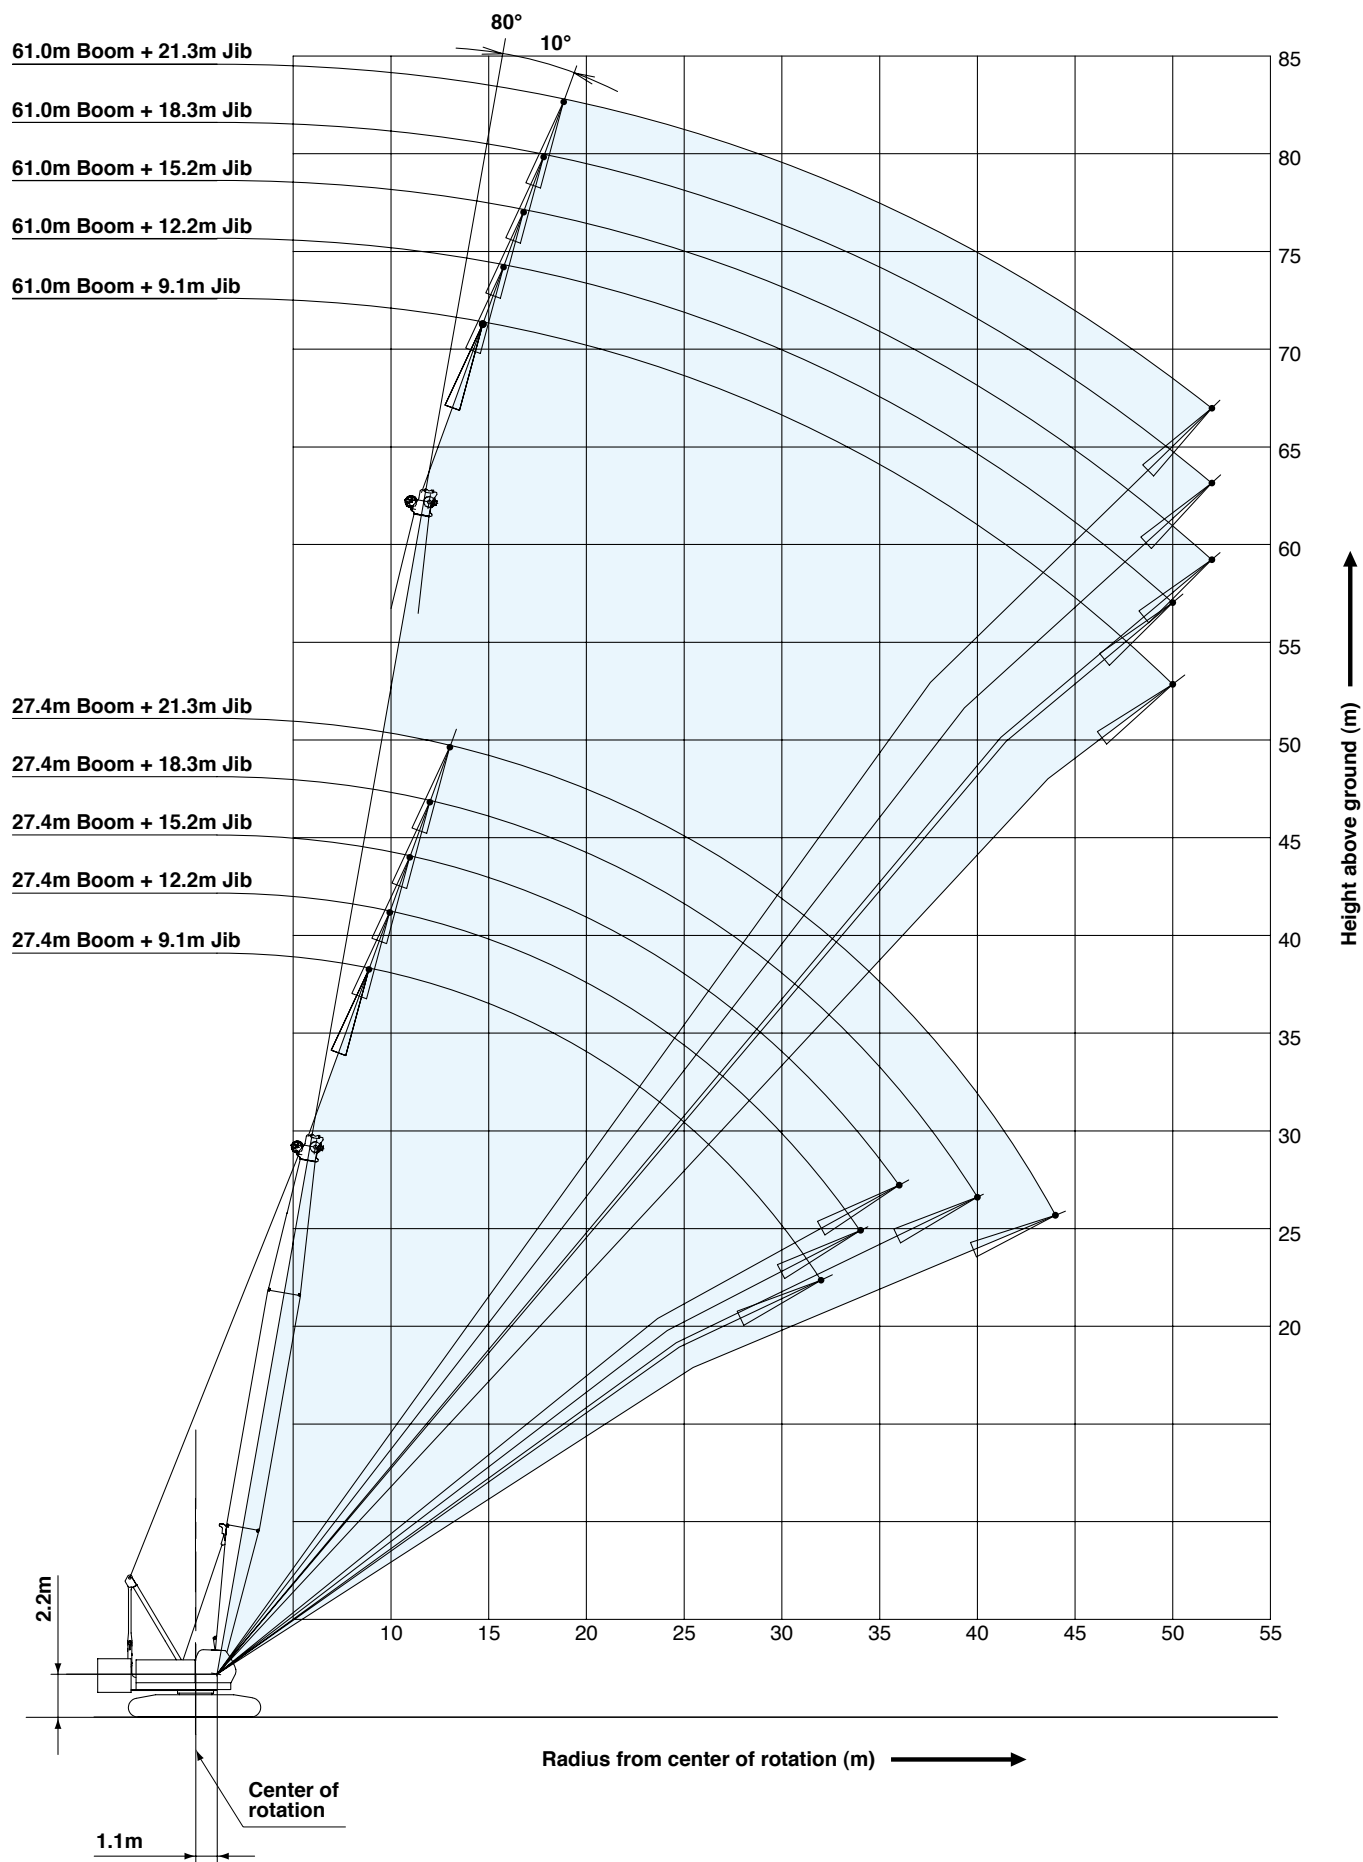

# WORKING RANGES

## Fixed Jib 30°

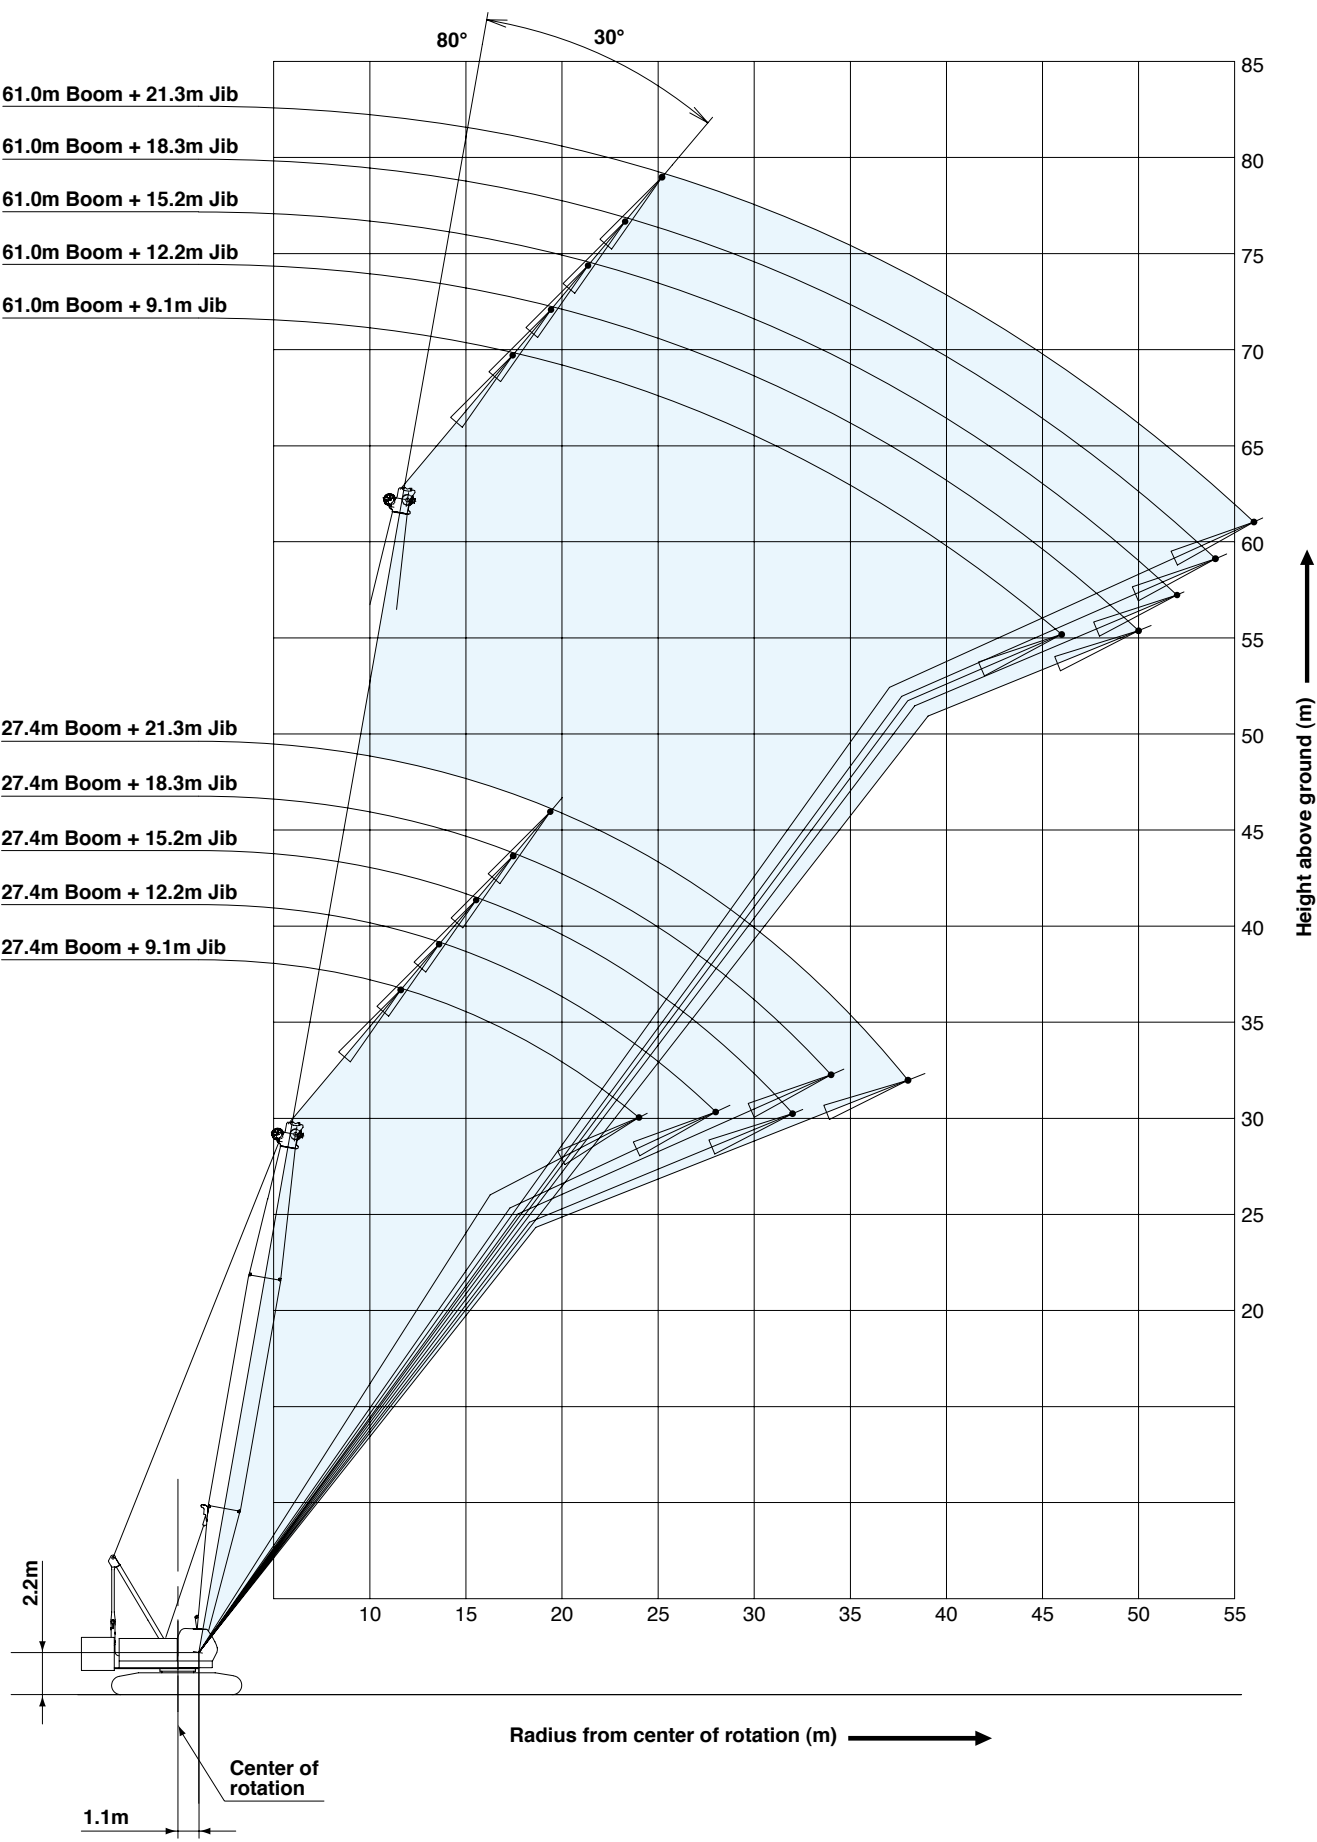



# SUPPLEMENTAL DATA

- Ratings according to EN13000.
- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of hook block (s), slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment.  
The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Ratings are for operation on a firm and level surface, up to 1 % gradient.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 10 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Ratings inside of boxes   are limited by strength of materials.
- The minimum rated load is 1.5 (Ton).
- Crawler frames must be fully extended for all crane operations.

**(Crane boom lifting)**

- The total load that can be lifted is the value for weight of main hook block, slings, and all other load handling accessories deducted from crane boom ratings shown.

**(Fixed jib lifting)**

- The total load that can be lifted is the value for weight of jib hook block, slings, and all other load handling accessories deducted from fixed jib ratings shown.
- The availability of fixed jib mounting
  - On crane boom : Range 27.4 m to 61.0 m.

**<Reference Information>**

**Main hoist loads**

No. of Parts of Line	1	2	3	4	5
Maximum Loads (kN)	108	216	324	431	539
Maximum Loads (t)	11.0	22.0	33.0	44.0	55.0

No. of Parts of Line	6	7	8	9	10
Maximum Loads (kN)	647	755	863	971	1,079
Maximum Loads (t)	66.0	77.0	88.0	99.0	110.0

**Auxiliary hoist loads**

No. of Parts of Line	1	2
Maximum Loads (kN)	108	216
Maximum Loads (t)	11.0	22.0

Weight of hook block				
Hook Block	110 t	70 t	35 t	Ball Hook
Weight (t)	1.7	0.9	0.7	0.45

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.
---



# LIFTING CAPACITIES

Crane Boom Lifting Capacities												Counterweight: 34.6 t Carbody Weight: 6.5 t	
Unit: metric ton													
Working radius (m)	Boom length (m)	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	Boom length (m)	Working radius (m)
3.5	3.6m/110.0												3.5
4.0	98.6	4.1m/95.3	4.6m/86.0										4.0
5.0	77.7	77.7	77.7	77.0	5.5m/66.0	5.9m/58.9							5.0
6.0	62.2	62.2	62.2	62.2	60.7	58.2	6.4m/52.4	6.8m/47.1					6.0
7.0	53.3	53.2	53.2	53.1	51.2	49.4	47.6	46.0	7.3m/42.7	7.8m/38.9			7.0
8.0	44.5	44.4	44.4	44.2	44.2	42.7	41.4	40.1	38.9	37.7			8.0
9.0	37.6	37.5	37.4	37.3	37.3	37.2	36.5	35.5	34.5	33.5			9.0
10.0	32.5	32.4	32.3	32.2	32.2	32.1	32.0	31.7	30.9	30.1			10.0
12.0	25.5	25.3	25.2	25.1	25.1	24.9	24.9	24.8	24.7	24.6			12.0
14.0	20.8	20.7	20.6	20.4	20.4	20.3	20.2	20.1	20.0	19.9			14.0
16.0	14.4m/20.1	17.4	17.3	17.1	17.1	16.9	16.9	16.7	16.7	16.6			16.0
18.0		17.1m/16.0	14.8	14.7	14.6	14.5	14.4	14.3	14.2	14.1			18.0
20.0			19.7m/13.2	12.8	12.7	12.6	12.5	12.4	12.3	12.2			20.0
22.0				11.3	11.2	11.1	11.0	10.8	10.8	10.6			22.0
24.0				22.4m/11.1	10.0	9.8	9.8	9.6	9.5	9.4			24.0
26.0					25.0m/9.5	8.8	8.7	8.6	8.5	8.4			26.0
28.0						27.6m/8.1	7.9	7.7	7.6	7.5			28.0
30.0							7.2	7.0	6.9	6.8			30.0
32.0							30.3m/7.1	6.4	6.3	6.1			32.0
34.0								32.9m/6.1	5.7	5.6			34.0
36.0									35.6m/5.3	5.1			36.0
38.0										4.7			38.0
40.0										38.2m/4.6			40.0
Reeves	10	9	8	7	6	6	5	5	4	4			Reeves

Working radius (m)	Boom length (m)	45.7	48.8	51.8	54.9	57.9	61.0	64.0	67.1	70.1	Boom length (m)	Working radius (m)
8.0	8.2m/35.6	8.7m/32.9										8.0
9.0	32.4	31.7	9.1m/30.4	9.6m/28.1								9.0
10.0	29.1	28.5	27.7	27.0	26.1	10.5m/22.0	10.9m/22.0	11.4m/19.1	11.9m/15.0			10.0
12.0	24.0	23.6	23.0	22.4	21.7	21.4	20.8	18.4	14.9			12.0
14.0	19.8	19.7	19.4	18.9	18.4	18.2	17.6	16.5	13.1			14.0
16.0	16.4	16.4	16.3	16.1	15.8	15.6	15.2	14.8	11.7			16.0
18.0	13.9	13.9	13.8	13.6	13.5	13.5	13.2	12.8	10.4			18.0
20.0	12.0	12.0	11.9	11.7	11.6	11.6	11.4	11.3	9.3			20.0
22.0	10.5	10.5	10.3	10.2	10.0	10.1	9.9	9.8	8.3			22.0
24.0	9.2	9.2	9.1	8.9	8.8	8.8	8.6	8.5	7.5			24.0
26.0	8.2	8.2	8.0	7.9	7.7	7.7	7.6	7.5	6.7			26.0
28.0	7.3	7.3	7.2	7.0	6.9	6.9	6.7	6.6	6.0			28.0
30.0	6.6	6.5	6.4	6.3	6.1	6.1	6.0	5.8	5.3			30.0
32.0	5.9	5.9	5.8	5.6	5.5	5.5	5.3	5.2	4.7			32.0
34.0	5.4	5.3	5.2	5.0	4.9	4.9	4.7	4.6	4.2			34.0
36.0	4.9	4.8	4.7	4.6	4.4	4.4	4.2	4.1	3.7			36.0
38.0	4.5	4.4	4.3	4.1	4.0	3.9	3.8	3.6	3.2			38.0
40.0	4.1	4.0	3.9	3.7	3.5	3.5	3.3	3.2	2.7			40.0
42.0	40.8m/4.0	3.7	3.5	3.3	3.2	3.1	2.9	2.8	2.3			42.0
44.0		43.5m/3.5	3.2	3.0	2.8	2.8	2.6	2.4	1.9			44.0
46.0			2.9	2.7	2.5	2.5	2.3	2.1	1.6			46.0
48.0			46.1m/2.9	2.4	2.2	2.2	2.0	1.8				48.0
50.0				48.8m/2.3	2.0	1.9	1.7	1.6				50.0
52.0					51.4m/1.8	1.7	1.5					52.0
54.0						1.5						54.0
Reeves	4	3	3	3	3	2	2	2	2			Reeves

Note:  
Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Lifting capacities may vary depending on hook used or with/without auxiliary sheave.  
Please refer rated chart in operator's cabin.



<div><div></div><div><b>Fixed Jib Lifting Capacities (Without Main Hook Block)</b> <b>(Jib Offset Angle : 10°)</b></div></div>																Counterweight: 34.6 t Carbody Weight: 6.5 t		
Unit: metric ton																		
Boom length (m)		27.4					30.5					33.5					Boom length (m)	
Jib length (m)		9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	Jib length (m)	
Working radius (m)	10.0	10.9					10.9										10.0	
	12.0	10.9	10.9	10.9			10.9	10.9	10.9			10.9	10.9				12.0	
	14.0	10.9	10.9	10.9	9.8	7.1	10.9	10.9	10.9	9.9	7.1	10.9	10.9	10.9	9.9		14.0	
	16.0	10.9	10.9	10.9	9.6	6.9	10.9	10.9	10.9	9.7	6.9	10.9	10.9	10.9	9.7	7.0	16.0	
	18.0	10.9	10.9	10.2	8.9	6.7	10.9	10.9	10.7	9.3	6.8	10.9	10.9	10.9	9.5	6.8	18.0	
	20.0	10.9	10.9	9.2	8.0	6.5	10.9	10.9	9.7	8.4	6.6	10.9	10.9	10.2	8.8	6.7	20.0	
	22.0	10.9	10.2	8.4	7.3	6.4	10.9	10.9	8.9	7.6	6.5	10.9	10.9	9.3	8.0	6.5	22.0	
	24.0	10.1	9.4	7.7	6.7	6.0	10.0	10.0	8.2	7.0	6.3	9.9	10.0	8.6	7.4	6.4	24.0	
	26.0	9.1	8.7	7.2	6.2	5.5	8.9	9.1	7.6	6.5	5.8	8.8	9.0	8.0	6.8	6.1	26.0	
	28.0	8.2	8.1	6.7	5.7	5.1	8.0	8.2	7.0	6.0	5.4	7.9	8.1	7.4	6.3	5.6	28.0	
	30.0	7.4	7.5	6.2	5.4	4.7	7.3	7.4	6.6	5.6	5.0	7.2	7.3	7.0	5.9	5.2	30.0	
	32.0	6.8	6.9	5.9	5.0	4.4	6.6	6.7	6.2	5.3	4.7	6.5	6.6	6.5	5.6	4.9	32.0	
	34.0		6.3	5.5	4.7	4.2	6.1	6.2	5.9	5.0	4.4	6.0	6.1	6.1	5.3	4.6	34.0	
	36.0			5.3	4.5	3.9		5.7	5.6	4.7	4.1	5.5	5.5	5.6	5.0	4.3	36.0	
	38.0				4.2	3.7			5.3	4.5	3.9	5.0	5.1	5.2	4.7	4.1	38.0	
	40.0				4.0	3.5			4.9	4.3	3.7		4.7	4.8	4.5	3.9	40.0	
	42.0					3.3				4.1	3.5			4.4	4.3	3.7	42.0	
	44.0					3.2				3.9	3.4			4.1	4.1	3.5	44.0	
	46.0										3.2					3.8	3.4	46.0
	48.0																3.3	48.0
	50.0																3.1	50.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves	

Boom length (m)		36.6					39.6					42.7					Boom length (m)	
Jib length (m)		9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	Jib length (m)	
Working radius (m)	12.0	10.9	10.9				10.9					10.9					12.0	
	14.0	10.9	10.9	10.9	10.0		10.9	10.9	10.9			10.9	10.9	10.9			14.0	
	16.0	10.9	10.9	10.9	9.8	7.0	10.9	10.9	10.9	9.8	7.1	10.9	10.9	10.9	9.9	7.1	16.0	
	18.0	10.9	10.9	10.9	9.6	6.9	10.9	10.9	10.9	9.7	6.9	10.9	10.9	10.9	9.7	6.9	18.0	
	20.0	10.9	10.9	10.6	9.1	6.7	10.9	10.9	10.9	9.5	6.8	10.9	10.9	10.9	9.6	6.8	20.0	
	22.0	10.9	10.9	9.7	8.3	6.6	10.9	10.9	10.1	8.7	6.6	10.8	10.9	10.5	9.0	6.7	22.0	
	24.0	9.7	9.9	9.0	7.7	6.4	9.6	9.8	9.4	8.0	6.5	9.5	9.7	9.8	8.3	6.5	24.0	
	26.0	8.7	8.8	8.3	7.1	6.3	8.6	8.7	8.7	7.4	6.4	8.4	8.6	8.7	7.7	6.4	26.0	
	28.0	7.8	7.9	7.8	6.6	5.9	7.7	7.8	7.9	6.9	6.1	7.6	7.7	7.8	7.2	6.3	28.0	
	30.0	7.0	7.1	7.2	6.2	5.5	6.9	7.0	7.1	6.5	5.7	6.8	6.9	7.0	6.8	5.9	30.0	
	32.0	6.4	6.5	6.6	5.8	5.1	6.3	6.4	6.5	6.1	5.4	6.1	6.2	6.3	6.4	5.6	32.0	
	34.0	5.8	5.9	6.0	5.5	4.8	5.7	5.8	5.9	5.8	5.0	5.6	5.7	5.8	5.8	5.2	34.0	
	36.0	5.3	5.4	5.5	5.2	4.6	5.2	5.3	5.4	5.4	4.8	5.0	5.2	5.2	5.3	5.0	36.0	
	38.0	4.9	4.9	5.0	4.9	4.3	4.7	4.8	4.9	5.0	4.5	4.6	4.7	4.8	4.9	4.7	38.0	
	40.0	4.5	4.5	4.6	4.7	4.1	4.3	4.4	4.5	4.6	4.3	4.2	4.3	4.4	4.4	4.5	40.0	
	42.0		4.2	4.3	4.3	3.9	4.0	4.1	4.1	4.2	4.1	3.8	3.9	4.0	4.1	4.1	42.0	
	44.0			3.9	4.0	3.7		3.7	3.8	3.9	3.9	3.5	3.6	3.7	3.7	3.8	44.0	
	46.0				3.7	3.6			3.5	3.6	3.6		3.3	3.4	3.4	3.5	46.0	
	48.0				3.4	3.4			3.2	3.3	3.3		3.1	3.1	3.2	3.2	48.0	
	50.0					3.2				3.0	3.1			2.9	2.9	3.0	50.0	
	52.0										2.9				2.7	2.7	52.0	
	54.0										2.6				2.5	2.5	54.0	
	56.0															2.3	56.0	
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves	

Note:  
Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Lifting capacities may vary depending on hook used or with/without auxiliary sheave.  
Please refer rated chart in operator's cabin.




# LIFTING CAPACITIES

<div><div></div><div><b>Fixed Jib Lifting Capacities (Without Main Hook Block)</b> <b>(Jib Offset Angle : 10°)</b></div><div>Counterweight: 34.6 t Carbody Weight: 6.5 t Unit: metric ton</div></div>																		
Boom length (m)		45.7					48.8					51.8					Boom length (m)	
Jib length (m)		9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	Jib length (m)	
Working radius (m)	14.0	10.9	10.9				10.9	10.9				10.9					14.0	
	16.0	10.9	10.9	10.9	9.9		10.9	10.9	10.9	10.0		10.9	10.9	10.9			16.0	
	18.0	10.9	10.9	10.9	9.8	7.0	10.9	10.9	10.9	9.8	7.0	10.9	10.9	10.9	9.8	7.0	18.0	
	20.0	10.9	10.9	10.9	9.6	6.8	10.9	10.9	10.9	9.6	6.9	10.9	10.9	10.9	9.7	6.9	20.0	
	22.0	10.6	10.8	10.9	9.3	6.7	10.5	10.7	10.8	9.5	6.8	10.4	10.6	10.7	9.5	6.8	22.0	
	24.0	9.3	9.5	9.6	8.6	6.6	9.3	9.4	9.5	8.9	6.6	9.1	9.3	9.4	9.2	6.7	24.0	
	26.0	8.3	8.4	8.5	8.0	6.5	8.2	8.4	8.5	8.3	6.5	8.1	8.2	8.3	8.4	6.6	26.0	
	28.0	7.4	7.5	7.6	7.5	6.4	7.3	7.4	7.6	7.6	6.4	7.2	7.3	7.4	7.5	6.5	28.0	
	30.0	6.6	6.8	6.9	6.9	6.2	6.5	6.7	6.8	6.9	6.3	6.4	6.5	6.7	6.7	6.4	30.0	
	32.0	6.0	6.1	6.2	6.3	5.8	5.9	6.0	6.1	6.2	6.0	5.7	5.9	6.0	6.1	6.1	32.0	
	34.0	5.4	5.5	5.6	5.7	5.5	5.3	5.4	5.5	5.6	5.6	5.2	5.3	5.4	5.5	5.5	34.0	
	36.0	4.9	5.0	5.1	5.2	5.2	4.8	4.9	5.0	5.1	5.1	4.7	4.8	4.9	4.9	5.0	36.0	
	38.0	4.4	4.5	4.6	4.7	4.7	4.3	4.4	4.5	4.6	4.7	4.2	4.3	4.4	4.5	4.5	38.0	
	40.0	4.0	4.1	4.2	4.3	4.3	3.9	4.0	4.1	4.2	4.2	3.8	3.9	4.0	4.1	4.1	40.0	
	42.0	3.7	3.8	3.8	3.9	4.0	3.6	3.7	3.8	3.8	3.9	3.4	3.5	3.6	3.7	3.7	42.0	
	44.0	3.3	3.4	3.5	3.6	3.6	3.2	3.3	3.4	3.5	3.5	3.1	3.2	3.3	3.4	3.4	44.0	
	46.0	3.1	3.1	3.2	3.3	3.3	3.0	3.0	3.1	3.2	3.2	2.8	2.9	3.0	3.1	3.1	46.0	
	48.0	2.8	2.9	2.9	3.0	3.1	2.7	2.8	2.8	2.9	3.0	2.5	2.6	2.7	2.8	2.8	48.0	
	50.0		2.6	2.7	2.8	2.8	2.4	2.5	2.6	2.7	2.7	2.2	2.3	2.4	2.5	2.5	50.0	
	52.0			2.4	2.5	2.6		2.2	2.3	2.4	2.4	1.9	2.0	2.1	2.2	2.2	52.0	
	54.0				2.3	2.3			2.0	2.1	2.2		1.8	1.9	1.9	2.0	54.0	
	56.0				2.0	2.1			1.8	1.9	1.9		1.5	1.6	1.7	1.8	56.0	
	58.0					1.9				1.7	1.7						58.0	
	60.0										1.5						60.0	
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves	

Boom length (m)																	Boom length (m)
Jib length (m)		9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	Jib length (m)
Working radius (m)	14.0	10.9															14.0
	16.0	10.9	10.9	10.9			10.9	10.9				10.9	10.9				16.0
	18.0	10.9	10.9	10.9	9.9	7.1	10.9	10.9	10.9	9.9		10.9	10.9	10.9	9.9		18.0
	20.0	10.9	10.9	10.9	9.7	6.9	10.9	10.9	10.9	9.8	7.0	10.9	10.8	10.8	9.8	7.0	20.0
	22.0	10.3	10.5	10.6	9.6	6.8	10.1	10.3	10.5	9.6	6.8	10.1	10.3	10.4	9.7	6.9	22.0
	24.0	9.0	9.2	9.3	9.4	6.7	8.9	9.0	9.2	9.3	6.7	8.8	9.0	9.1	9.2	6.8	24.0
	26.0	7.9	8.1	8.2	8.3	6.6	7.8	8.0	8.1	8.2	6.6	7.7	7.9	8.0	8.1	6.7	26.0
	28.0	7.0	7.2	7.3	7.4	6.5	6.9	7.0	7.2	7.3	6.5	6.8	7.0	7.1	7.2	6.6	28.0
	30.0	6.3	6.4	6.5	6.6	6.4	6.1	6.3	6.4	6.5	6.4	6.1	6.2	6.3	6.4	6.5	30.0
	32.0	5.6	5.7	5.8	5.9	6.0	5.4	5.6	5.7	5.8	5.8	5.4	5.5	5.6	5.7	5.8	32.0
	34.0	5.0	5.1	5.2	5.3	5.4	4.9	5.0	5.1	5.2	5.2	4.8	4.9	5.0	5.1	5.2	34.0
	36.0	4.5	4.6	4.7	4.8	4.9	4.4	4.5	4.6	4.7	4.7	4.3	4.4	4.5	4.6	4.6	36.0
	38.0	4.1	4.2	4.3	4.3	4.4	3.9	4.0	4.1	4.2	4.3	3.8	3.9	4.0	4.1	4.2	38.0
	40.0	3.6	3.8	3.9	3.9	4.0	3.5	3.6	3.7	3.8	3.8	3.4	3.5	3.6	3.7	3.8	40.0
	42.0	3.3	3.4	3.5	3.6	3.6	3.1	3.2	3.3	3.4	3.5	3.0	3.1	3.3	3.3	3.4	42.0
	44.0	2.9	3.1	3.1	3.2	3.3	2.7	2.9	3.0	3.1	3.1	2.6	2.7	2.9	3.0	3.0	44.0
	46.0	2.6	2.7	2.8	2.9	3.0	2.4	2.5	2.6	2.7	2.8	2.2	2.4	2.5	2.6	2.7	46.0
	48.0	2.2	2.4	2.5	2.6	2.6	2.0	2.2	2.3	2.4	2.4	1.9	2.1	2.2	2.3	2.3	48.0
	50.0	2.0	2.1	2.2	2.3	2.3	1.7	1.9	2.0	2.1	2.1	1.6	1.8	1.9	2.0	2.0	50.0
	52.0	1.7	1.8	1.9	2.0	2.1		1.6	1.7	1.8	1.8			1.6	1.7	1.7	52.0
	54.0		1.6	1.7	1.7	1.8				1.5	1.6						54.0
	56.0				1.5	1.6											56.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Note:  
Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Lifting capacities may vary depending on hook used or with/without auxiliary sheave.  
Please refer rated chart in operator's cabin.



<div><div></div><div><b>Fixed Jib Lifting Capacities (Without Main Hook Block)</b> <b>(Jib Offset Angle : 30°)</b></div></div>																Counterweight: 34.6 t Carbody Weight: 6.5 t		
Unit: metric ton																		
Boom length (m)		27.4					30.5					33.5					Boom length (m)	
Jib length (m)		9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	Jib length (m)	
Working radius (m)	12.0	9.5															12.0	
	14.0	9.5	7.0				9.5					9.5					14.0	
	16.0	9.5	7.0	5.2			9.5	7.0				9.5	7.0				16.0	
	18.0	9.5	7.0	5.2	4.2		9.5	7.0	5.2			9.5	7.0	5.2			18.0	
	20.0	9.5	7.0	5.2	4.2	4.2	9.5	7.0	5.2	4.2		9.5	7.0	5.2	4.2		20.0	
	22.0	9.1	6.7	5.2	4.2	4.0	9.4	6.9	5.2	4.2	4.1	9.5	7.0	5.2	4.2	4.1	22.0	
	24.0	8.6	6.4	5.1	4.2	3.7	8.9	6.5	5.2	4.2	3.8	9.2	6.7	5.2	4.2	3.9	24.0	
	26.0		6.1	4.9	4.1	3.5	8.6	6.3	5.0	4.2	3.6	8.8	6.4	5.1	4.2	3.7	26.0	
	28.0		5.8	4.6	3.9	3.3	8.2	6.0	4.8	4.0	3.4	8.1	6.2	4.9	4.1	3.5	28.0	
	30.0			4.5	3.7	3.2		5.8	4.6	3.8	3.3	7.3	6.0	4.7	3.9	3.3	30.0	
	32.0			4.3	3.6	3.0			4.4	3.7	3.1		5.8	4.5	3.8	3.2	32.0	
	34.0				3.4	2.9				3.5	3.0			4.4	3.6	3.1	34.0	
	36.0					2.8				3.4	2.9				3.5	3.0	36.0	
	38.0					2.7					2.8				3.4	2.9	38.0	
	40.0															2.8	40.0	
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves	

Boom length (m)		36.6					39.6					42.7					Boom length (m)	
Jib length (m)		9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	Jib length (m)	
Working radius (m)	14.0	9.5					9.5										14.0	
	16.0	9.5	7.0				9.5	7.0				9.5					16.0	
	18.0	9.5	7.0	5.2			9.5	7.0	5.2			9.5	7.0				18.0	
	20.0	9.5	7.0	5.2	4.2		9.5	7.0	5.2	4.2		9.5	7.0	5.2			20.0	
	22.0	9.5	7.0	5.2	4.2	4.2	9.5	7.0	5.2	4.2	4.2	9.5	7.0	5.2	4.2		22.0	
	24.0	9.5	6.9	5.2	4.2	4.0	9.5	7.0	5.2	4.2	4.0	9.5	7.0	5.2	4.2	4.1	24.0	
	26.0	8.9	6.6	5.2	4.2	3.8	8.8	6.7	5.2	4.2	3.8	8.7	6.9	5.2	4.2	3.9	26.0	
	28.0	8.0	6.3	5.0	4.2	3.6	7.9	6.5	5.1	4.2	3.6	7.8	6.6	5.2	4.2	3.7	28.0	
	30.0	7.2	6.1	4.8	4.0	3.4	7.1	6.3	4.9	4.1	3.5	7.0	6.4	5.0	4.2	3.6	30.0	
	32.0	6.5	5.9	4.7	3.8	3.3	6.4	6.1	4.8	3.9	3.3	6.3	6.2	4.9	4.0	3.4	32.0	
	34.0		5.7	4.5	3.7	3.1		5.9	4.6	3.8	3.2	5.7	5.9	4.7	3.9	3.3	34.0	
	36.0			4.4	3.6	3.0		5.4	4.5	3.7	3.1	5.2	5.3	4.6	3.7	3.2	36.0	
	38.0			4.2	3.5	2.9			4.3	3.5	3.0		4.9	4.4	3.6	3.1	38.0	
	40.0				3.4	2.8				3.4	2.9			4.3	3.5	3.0	40.0	
	42.0					2.7				3.4	2.8				3.4	2.9	42.0	
	44.0					2.7					2.7				3.3	2.8	44.0	
46.0															2.7	46.0		
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves	

Note:  
Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Lifting capacities may vary depending on hook used or with/without auxiliary sheave.  
Please refer rated chart in operator's cabin.





# LIFTING CAPACITIES

<div><div></div><div><b>Fixed Jib Lifting Capacities (Without Main Hook Block)</b> <b>(Jib Offset Angle : 30°)</b></div></div> <div>Counterweight: 34.6 t Carbody Weight: 6.5 t Unit: metric ton</div>																		
Boom length (m)		45.7					48.8					51.8					Boom length (m)	
Jib length (m)		9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	Jib length (m)	
Working radius (m)	16.0	9.5					9.5					9.5					16.0	
	18.0	9.5	7.0				9.5	7.0				9.5	7.0				18.0	
	20.0	9.5	7.0	5.2			9.5	7.0	5.2			9.5	7.0	5.2			20.0	
	22.0	9.5	7.0	5.2	4.2		9.5	7.0	5.2	4.2		9.5	7.0	5.2	4.2		22.0	
	24.0	9.5	7.0	5.2	4.2	4.1	9.5	7.0	5.2	4.2	4.2	9.5	7.0	5.2	4.2	4.2	24.0	
	26.0	8.6	7.0	5.2	4.2	3.9	8.5	7.0	5.2	4.2	4.0	8.4	7.0	5.2	4.2	4.0	26.0	
	28.0	7.6	6.8	5.2	4.2	3.8	7.6	6.9	5.2	4.2	3.8	7.4	7.0	5.2	4.2	3.9	28.0	
	30.0	6.8	6.5	5.1	4.2	3.6	6.8	6.7	5.2	4.2	3.7	6.7	6.8	5.2	4.2	3.7	30.0	
	32.0	6.1	6.3	5.0	4.1	3.5	6.1	6.3	5.0	4.1	3.5	6.0	6.2	5.1	4.2	3.6	32.0	
	34.0	5.5	5.7	4.8	3.9	3.3	5.5	5.7	4.9	4.0	3.4	5.4	5.6	5.0	4.1	3.4	34.0	
	36.0	5.0	5.2	4.7	3.8	3.2	4.9	5.1	4.7	3.9	3.3	4.8	5.0	4.8	3.9	3.3	36.0	
	38.0	4.6	4.7	4.5	3.7	3.1	4.5	4.6	4.6	3.8	3.2	4.4	4.5	4.7	3.8	3.2	38.0	
	40.0			4.4	3.6	3.0		4.2	4.4	3.7	3.1	3.9	4.1	4.2	3.7	3.1	40.0	
	42.0			4.0	3.5	2.9		3.8	4.0	3.6	3.0		3.7	3.9	3.6	3.0	42.0	
	44.0				3.4	2.8			3.6	3.5	2.9		3.4	3.5	3.5	2.9	44.0	
	46.0					2.8				3.4	2.8			3.2	3.3	2.9	46.0	
	48.0					2.7				3.1	2.7				3.0	2.8	48.0	
	50.0					2.6					2.7				2.7	2.7	50.0	
	52.0															2.5	52.0	
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves	

Boom length (m)																Boom length (m)	
Jib length (m)		9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	9.1	12.2	15.2	18.3	21.3	Jib length (m)
Working radius (m)	18.0	9.5					9.5					9.5					18.0
	20.0	9.5	7.0				9.5	7.0				9.5	7.0				20.0
	22.0	9.5	7.0	5.2			9.5	7.0	5.2			9.5	7.0	5.2			22.0
	24.0	9.4	7.0	5.2	4.2		9.3	7.0	5.2	4.2		9.2	7.0	5.2	4.2		24.0
	26.0	8.3	7.0	5.2	4.2	4.1	8.1	7.0	5.2	4.2	4.1	8.1	7.0	5.2	4.2	4.1	26.0
	28.0	7.3	7.0	5.2	4.2	3.9	7.2	7.0	5.2	4.2	4.0	7.1	7.0	5.2	4.2	4.0	28.0
	30.0	6.5	6.8	5.2	4.2	3.8	6.4	6.6	5.2	4.2	3.8	6.3	6.6	5.2	4.2	3.8	30.0
	32.0	5.8	6.0	5.2	4.2	3.6	5.7	5.9	5.2	4.2	3.7	5.6	5.9	5.2	4.2	3.7	32.0
	34.0	5.2	5.4	5.0	4.1	3.5	5.1	5.3	5.1	4.2	3.5	5.0	5.3	5.2	4.2	3.6	34.0
	36.0	4.7	4.9	4.9	4.0	3.4	4.6	4.8	4.9	4.1	3.4	4.5	4.7	4.9	4.1	3.5	36.0
	38.0	4.2	4.4	4.6	3.9	3.3	4.1	4.3	4.4	3.9	3.3	4.0	4.2	4.4	4.0	3.4	38.0
	40.0	3.8	4.0	4.1	3.8	3.2	3.7	3.8	4.0	3.8	3.2	3.6	3.8	3.9	3.9	3.3	40.0
	42.0	3.4	3.6	3.7	3.7	3.1	3.3	3.4	3.6	3.7	3.1	3.2	3.4	3.5	3.7	3.2	42.0
	44.0	3.1	3.2	3.4	3.5	3.0	2.9	3.1	3.2	3.4	3.0	2.8	3.0	3.2	3.3	3.1	44.0
	46.0			3.0	3.2	2.9		2.7	2.9	3.0	3.0	2.4	2.6	2.8	3.0	3.0	46.0
	48.0			2.7	2.9	2.8			2.6	2.7	2.9		2.3	2.5	2.6	2.8	48.0
	50.0				2.6	2.7			2.2	2.4	2.5		2.0	2.1	2.3	2.4	50.0
	52.0					2.4				2.1	2.2			1.8	2.0	2.1	52.0
	54.0					2.1					1.9				1.7	1.8	54.0
	56.0										1.7					1.6	56.0
Reeves		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Note:  
Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Lifting capacities may vary depending on hook used or with/without auxiliary sheave.  
Please refer rated chart in operator's cabin.





# SUPPLEMENTAL DATA FOR CLAMSHELL RATING CHART

- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of bucket, slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Rated loads do not exceed 66% of minimum tipping loads.
- Ratings are for operation on a firm and level surface, up to 1% gradient.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 10 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Crawler frames must be fully extended for all crane operations.

### (Clamshell bucket lifting)


- The total load that can be lifted is the value for weight of bucket, slings, and all other load handling accessories deducted from main boom ratings shown.
- The weight of bucket and materials must not exceed rated load.
- Optimum bucket should be required according to material.
- $\text{Bucket capacity (m}^3\text{)} \times \text{specified gravity of material (ton/m}^3\text{)} + \text{bucket weight (ton)} = \text{rated load.}$
- Bucket weight must also be decreased according to operating cycle and bucket lowering height.
- Rated loads are determined by stability and boom strength. During simultaneous operations of boom and swing, rapid acceleration or deceleration must be avoided.
- Do not attempt to cast the bucket while swinging or diagonal draw-cutting.

### <Reference Information>

#### Main hoist loads

No. of Parts of Line	1
Maximum Loads (kN)	98
Maximum Loads (t)	10.0


#### Assembling the counterweight



Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.



# LIFTING CAPACITIES

<div><div></div><div><div>Clamshell Rating Charts</div><div>Crane Boom Capacities</div></div></div> <div><div>Counterweight: 23.1 t</div><div>Without Carbody Weight</div><div>Crawler Fully Extended</div><div>Unit: metric ton</div></div>											
Load radius (m)	Boom length (m)	15.2	18.3	21.3	24.4					Boom length (m)	Load radius (m)
7.0	10.0	10.0								7.0	
8.0	10.0	10.0	10.0							8.0	
9.0	10.0	10.0	10.0	10.0						9.0	
10.0	10.0	10.0	10.0	10.0	9.4					10.0	
11.0	10.0	10.0	10.0	10.0	9.3					11.0	
12.0	10.0	10.0	10.0	10.0	9.3					12.0	
13.0	10.0	10.0	10.0	10.0	9.3					13.0	
14.0	10.0	10.0	10.0	10.0	9.3					14.0	
15.0		10.0	10.0	10.0	9.3					15.0	
16.0		9.8	9.9	9.0						16.0	
17.0			9.3	8.8						17.0	
18.0			8.6	8.6						18.0	
19.0			7.9	8.2						19.0	
20.0				7.6						20.0	
21.0				7.1						21.0	
22.0										22.0	
23.0										23.0	
24.0										24.0	
25.0										25.0	
26.0										26.0	
27.0										27.0	
28.0										28.0	
29.0										29.0	
30.0										30.0	
31.0										31.0	
32.0										32.0	
33.0										33.0	
Reeves		1	1	1	1					Reeves	

Note:  
Please refer rated chart in operator's cabin.



# SUPPLEMENTAL DATA FOR REDUCED WEIGHTS RATING CHART


- Ratings according to EN13000.
- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of hook block (s), slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Ratings are for operation on a firm and level surface, up to 1% gradient.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 10 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Ratings inside of boxes  are limited by strength of materials.
- The minimum rated load is 1.5 (ton).
- Crawler frames must be fully extended for all crane operations.

### (Crane boom lifting)

- The total load that can be lifted is the value for weight of hook block, slings, and all other load handling accessories deducted from main boom ratings shown.

Counterweight	Carbody weight	Boom lenght	
		Without aux.	With aux.
23.1 ton	Without	15.2 m ~ 57.9 m	15.2 m ~ 54.9 m

### Assembling the counterweight

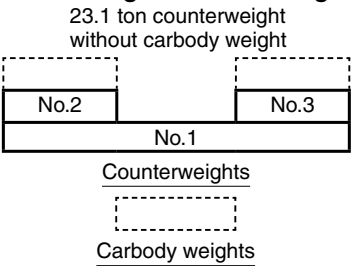

### <Reference Information>

#### Main hoist loads

No. of Parts of Line	1	2	3	4	5
Maximum Loads (kN)	108	216	324	431	539
Maximum Loads (t)	11.0	22.0	33.0	44.0	55.0

No. of Parts of Line	6	7	8	9	10
Maximum Loads (kN)	647	755	863	971	1,079
Maximum Loads (t)	66.0	77.0	88.0	99.0	110.0

#### Auxiliary hoist loads

No. of Parts of Line	1	2
Maximum Loads (kN)	108	216
Maximum Loads (t)	11.0	22.0

Weight of hook block				
Hook Block	110 t	70 t	35 t	Ball Hook
Weight (t)	1.7	0.9	0.7	0.45

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.



# LIFTING CAPACITIES



Reduced Weights Rating Charts												Counterweight: 23.1 t Without Carbody Weight Crawler Fully Extended Unit: metric ton	
Boom length (m) Working radius (m)		15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	Boom length (m) Working radius (m)	
3.5	3.6m/94.2											3.5	
4.0	85.3	4.1m/83.3										4.0	
4.5	76.2	75.7	4.6m/69.2									4.5	
5.0	68.9	66.0	62.3	59.1								5.0	
5.5	58.9	58.4	55.5	52.8	5.5m/50.4	5.9m/44.6						5.5	
6.0	50.8	50.4	49.9	47.8	45.7	43.8	6.4m/39.2	6.8m/35.4				6.0	
7.0	39.6	39.3	39.0	38.7	38.4	37.0	35.6	34.4	7.3m/31.7	7.8m/28.6		7.0	
8.0	32.3	32.3	32.2	32.1	32.0	31.9	30.8	29.9	28.8	27.9		8.0	
9.0	27.2	27.2	27.2	27.2	27.2	27.1	27.0	26.3	25.4	24.7		9.0	
10.0	23.5	23.5	23.5	23.5	23.4	23.3	23.2	23.2	22.7	22.0		10.0	
12.0	18.2	18.2	18.2	18.2	18.1	18.0	18.0	17.9	17.9	17.7		12.0	
14.0	14.8	14.8	14.8	14.8	14.7	14.6	14.5	14.4	14.4	14.2		14.0	
16.0	14.4m/14.3	12.5	12.4	12.3	12.2	12.1	12.0	12.0	11.9	11.8		16.0	
18.0		17.1m/11.5	10.6	10.5	10.4	10.3	10.2	10.1	10.0	9.9		18.0	
20.0			19.7m/9.4	9.1	9.0	8.9	8.7	8.7	8.6	8.5		20.0	
22.0				8.0	7.9	7.7	7.6	7.6	7.5	7.4		22.0	
24.0				22.4m/7.8	7.0	6.8	6.7	6.7	6.6	6.4		24.0	
26.0					25.0m/6.5	6.1	5.9	5.9	5.8	5.7		26.0	
28.0						27.6m/5.6	5.3	5.3	5.1	5.0		28.0	
30.0							4.8	4.7	4.6	4.5		30.0	
32.0							30.3m/4.6	4.3	4.1	4.0		32.0	
34.0								32.9m/4.1	3.7	3.5		34.0	
36.0									35.6m/3.3	3.1		36.0	
38.0										2.8		38.0	
40.0										38.2m/2.6		40.0	
42.0												42.0	
44.0												44.0	
Reeves	10	8	7	6	5	5	4	4	3	3		Reeves	

Working radius (m)	Boom length (m)	45.7	48.8	51.8	54.9	57.9						Boom length (m)	Working radius (m)
8.0	8.2m/26.3	8.7m/24.0											8.0
9.0	23.9	23.2	9.1m/22.2	9.6m/20.3									9.0
10.0	21.3	20.8	20.1	19.5	18.9								10.0
12.0	17.4	17.0	16.5	16.0	15.5								12.0
14.0	14.1	14.0	13.8	13.4	13.0								14.0
16.0	11.6	11.6	11.4	11.4	11.0								16.0
18.0	9.8	9.7	9.6	9.6	9.4								18.0
20.0	8.3	8.3	8.1	8.1	8.0								20.0
22.0	7.2	7.1	7.0	7.0	6.8								22.0
24.0	6.3	6.2	6.1	6.0	5.9								24.0
26.0	5.5	5.4	5.3	5.3	5.1								26.0
28.0	4.9	4.8	4.6	4.6	4.5								28.0
30.0	4.3	4.2	4.1	4.0	3.8								30.0
32.0	3.8	3.7	3.5	3.5	3.3								32.0
34.0	3.3	3.3	3.1	3.0	2.8								34.0
36.0	2.9	2.9	2.7	2.6	2.4								36.0
38.0	2.6	2.5	2.3	2.2	2.1								38.0
40.0	2.2	2.2	2.0	1.9	1.7								40.0
42.0	40.8m/2.1	1.9	1.7	1.6									42.0
44.0		43.5m/1.6											44.0
46.0													46.0
48.0													48.0
50.0													50.0
52.0													52.0
54.0													54.0
56.0													56.0
58.0													58.0
Reeves	3	3	3	2	2							Reeves	


Note:  
Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Lifting capacities may vary depending on hook used or with/without auxiliary sheave.  
Please refer rated chart in operator's cabin.

# SUPPLEMENTAL DATA FOR BARGE RATING CHART

- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of hook block (s), slings and all other load handling accessories from main boom ratings shown.
- Condition of barge stability this rating chart were determined under the condition below. The stability of barge shall meet below condition. During operation the machinery static inclination against horizontal level.  
(A) Both sides (right & left) of machine  
Maximum inclination shall be within 1.5 degrees  
(B) Front & backward of machine  
Maximum inclination shall be within 3.0 degrees

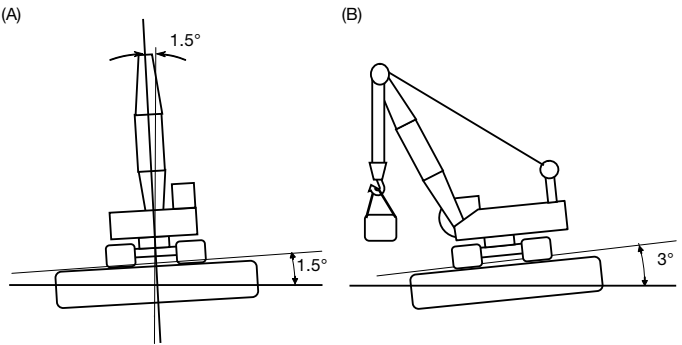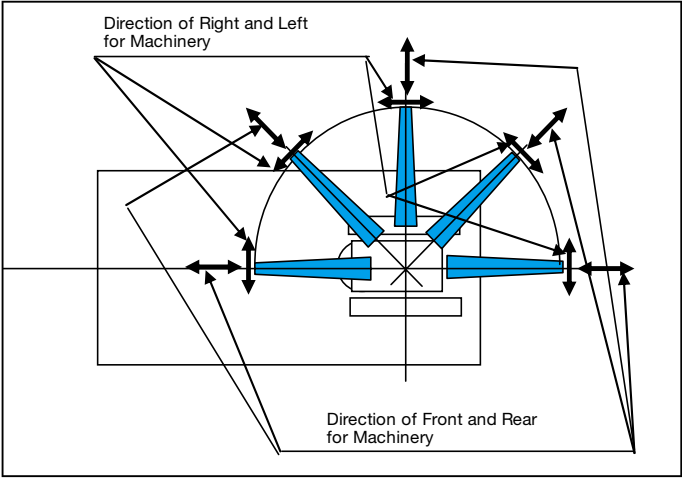

- Working area shall be inshore and smooth water.
- Applicable regulations for structure japanese construction codes for mobile crane  
※Regulation of class of shipping (abs, lloyd, bv, nk, etc) are not adapted.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 10 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.

- The boom should be erected over the front of the crawlers, not laterally.
- Ratings inside of boxes  are limited by strength of materials.
- The minimum rated load is 1.5 (ton).
- Crawler frames must be fully extended for all crane operations.
- The machinery should be fastened to the deck of the barge to prevent tip over and sliding.
- Towing area  
Towing area shall be within coastal area and quiet wave condition. Offshore and open sea is not considered for this machinery. Depend on the height of wave, counterweight shall be reduced during towing.

### (Crane boom lifting)

- The total load that can be lifted is the value for weight of hook block, slings, and all other load handling accessories deducted from main boom ratings shown.

### <Reference Information>

#### Main hoist loads

No. of Parts of Line	1	2	3	4	5
Maximum Loads (kN)	108	216	324	431	539
Maximum Loads (t)	11.0	22.0	33.0	44.0	55.0

No. of Parts of Line	6
Maximum Loads (kN)	618
Maximum Loads (t)	63.0

#### Auxiliary hoist loads


No. of Parts of Line	1	2
Maximum Loads (kN)	108	216
Maximum Loads (t)	11.0	22.0

Weight of Hook Block			
Hook Block	110 t	70 t	35 t
Weight (t)	1.7	0.9	0.7
			Ball Hook
			0.45

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.








# LIFTING CAPACITIES

<div><div></div><div><div>Barge Raiting Chart</div><div>Crane Boom Lifting Capacities</div></div></div> <div><div>Counterweight: 34.6 t</div><div>Carbody Weight: 6.5 t</div><div>Crawler Fully Extended</div><div>Unit: metric tons</div></div>											
Load radius (m)	Boom length (m)	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	Boom length (m)	Load radius (m)
5.0		63.0	5.5m/54.4								5.0
6.0		52.8	52.6	6.2m/46.4	6.9m/39.9						6.0
7.0		44.5	44.3	44.2	39.7	7.6m/35.1					7.0
8.0		37.7	37.5	37.4	37.0	34.5	7.6m/30.8				8.0
9.0		32.4	32.3	32.2	31.9	31.7	29.9	27.4	9.6m/24.9		9.0
10.0		28.3	28.2	28.0	28.0	27.9	27.8	26.5	24.5		10.0
12.0		21.4	22.0	21.9	21.8	21.7	21.6	21.5	21.4		12.0
14.0		16.3	17.2	17.7	18.0	17.9	17.8	17.7	17.6		14.0
16.0	14.4m/15.3		13.5	14.0	14.9	15.3	15.2	15.1	15.0		16.0
18.0			17.1m/11.9	11.3	12.2	12.8	13.2	13.1	13.0		18.0
20.0				19.7m/9.5	10.1	10.7	11.2	11.5	11.4		20.0
22.0					8.4	9.0	9.5	9.8	10.0		22.0
24.0					22.4m/8.1	7.6	8.1	8.4	8.7		24.0
26.0						25.0m/7.0	6.9	7.2	7.6		26.0
28.0							27.6m/6.0	6.2	6.6		28.0
30.0								5.4	5.7		30.0
32.0								30.3m/5.3	5.0		32.0
34.0									32.9m/4.7		34.0
Reeves		6	5	5	4	4	3	3	3		Reeves

Note:  
Ratings according to japanese construction codes for mobile cranes and japanese safety ordinance on cranes, etc.  
Ratings shown in   are determined by the strength of the boom or other structual components.  
Lifting capacities may vary depending on hook used or with/without auxiliary sheave.  
Please refer rated chart in operator's cabin.



# TRANSPORTATION PLAN

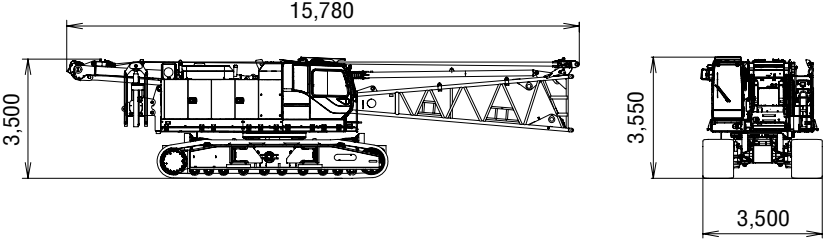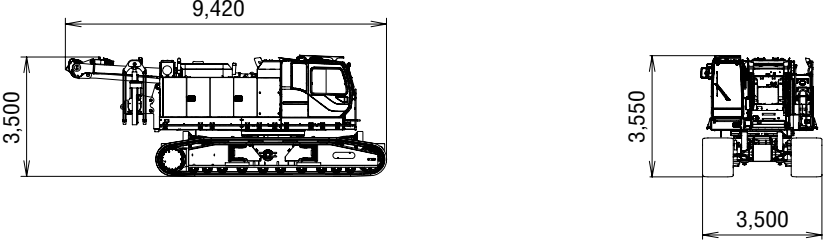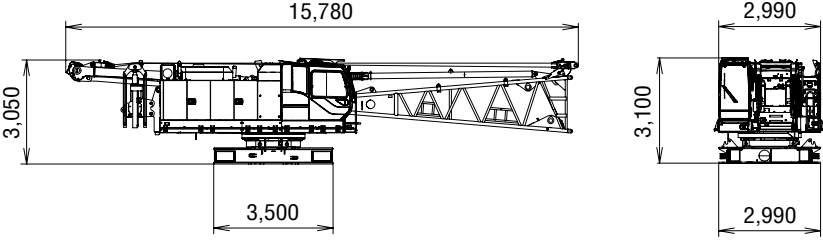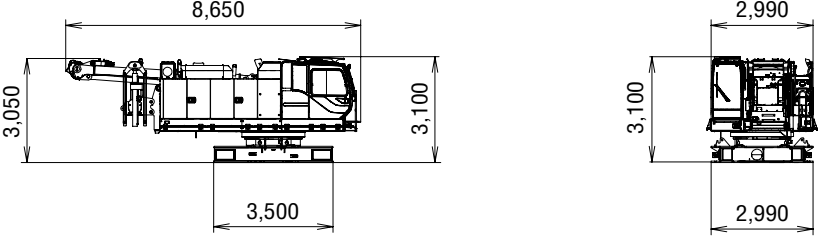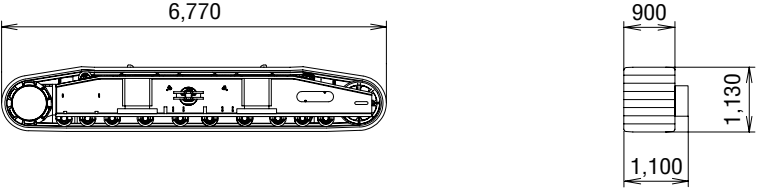Name	Dimension	Weight (kg)
<b>Base Machine</b> <ul style="list-style-type: none"><li>• Boom base</li><li>• Gantry</li><li>• Crawler</li><li>• Wire rope (Front / rear / boom hoist)</li></ul>		57,410
<b>Base Machine</b> <ul style="list-style-type: none"><li>• Gantry</li><li>• Crawler</li><li>• Wire rope (Front / rear / boom hoist)</li></ul>		54,090
<b>Base Machine</b> <ul style="list-style-type: none"><li>• Boom base</li><li>• Gantry</li><li>• Wire rope (Front / rear / boom hoist)</li><li>• Without crawler</li></ul>		33,550
<b>Base Machine</b> <ul style="list-style-type: none"><li>• Gantry</li><li>• Wire rope (Front / rear / boom hoist)</li><li>• Without crawler</li></ul>		30,230
Crawler		11,930

[illegible]




[illegible]



# PARTS AND ATTACHMENTS


**Base Machine**

Boom base, Gantry, Crawler, Wire rope (Front/rear/boom hoist)  
Weight: 57,410 kg Width: 3,500 mm

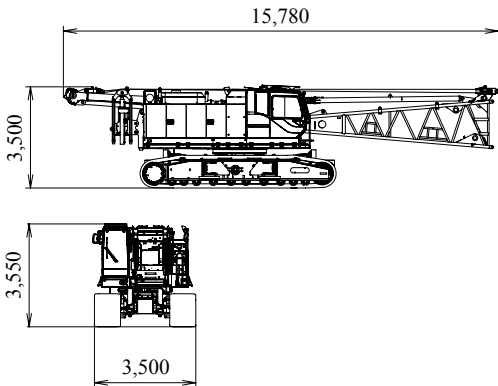


**Crawler**

Weight: 11,930 kg

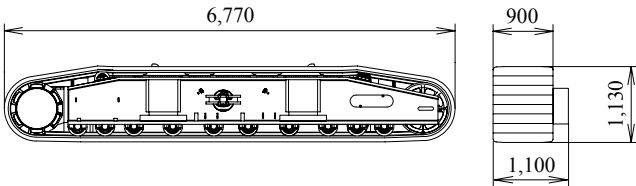


**Translifter**

Weight: 320 kg / 1 piece

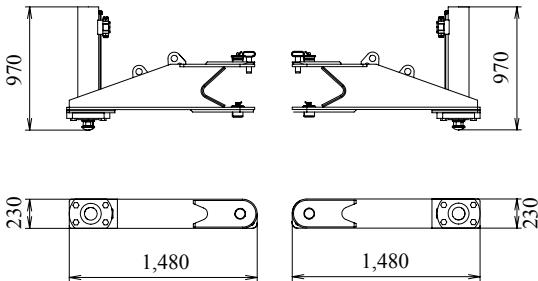


**Backstop**

Weight: 440 kg




**Jib Tip**

Weight: 280 kg




**Jib Base**

Weight: 200 kg




**3.0 m Jib Insert**

Weight: 100 kg




**6.0 m Jib Insert**

Weight: 180 kg




**Strut**

Weight: 250 kg




**Auxiliary Sheave**

Weight: 300 kg




**Counterweight No.1**

Weight: 11,600 kg

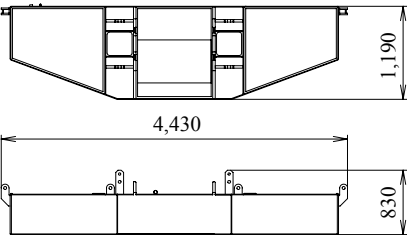


**Counterweight No.3, No.5 (R)**

Weight: 5,750 kg




**Counterweight No.2, No.4 (L)**

Weight: 5,750 kg




**Carbody Weight (With float)**

Weight: 3,320 kg / 1 piece




**Carbody Weight (Without float)**

Weight: 3,250 kg / 1 piece



**Self Removal Unit**


Weight: 870 kg

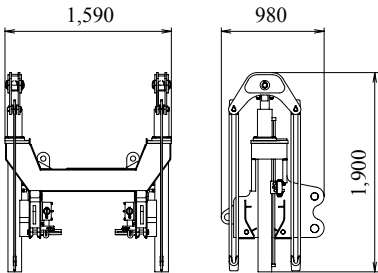




**Boom Tip**

Weight: 1,525 kg

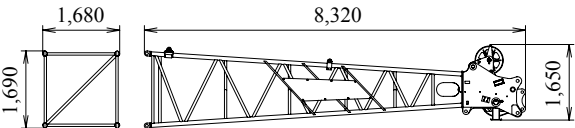

**Boom Base**


Weight: 2,235 kg

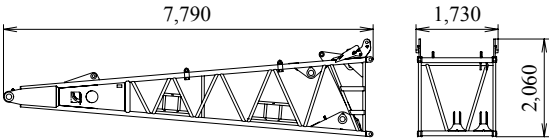

**3.0 m**

**Boom Insert**


Weight: 380 kg



**6.1 m**

**Boom Insert**


Weight: 655 kg

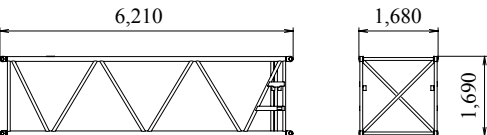

**12.2 m**

**Boom Insert**


Weight: 1,195 kg

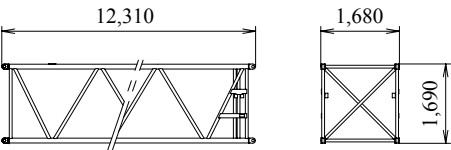

**12.2 m**


**Boom Insert (with Lug)**

Weight: 1,220 kg

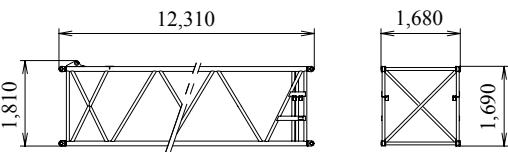


**Gantry**

Weight: 1,320 kg

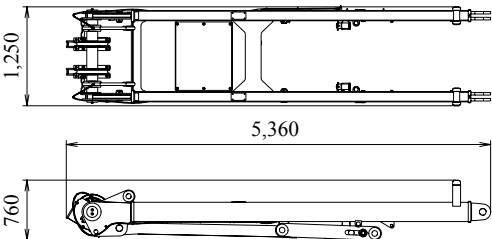


**Upper Spreader**

Weight: 300 kg

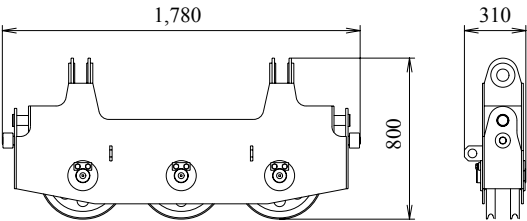


**Lower Spreader**

Weight: 200 kg

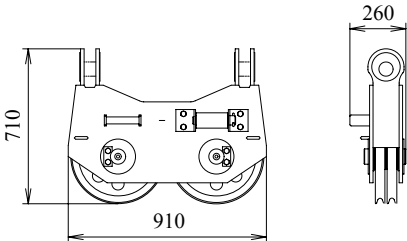


**Ball Hook**

Weight: 450 kg




**35 t Hook**

Weight: 700 kg




**70 t Hook**



Weight: 900 kg



**110 t Hook**

Weight: 1,700 kg



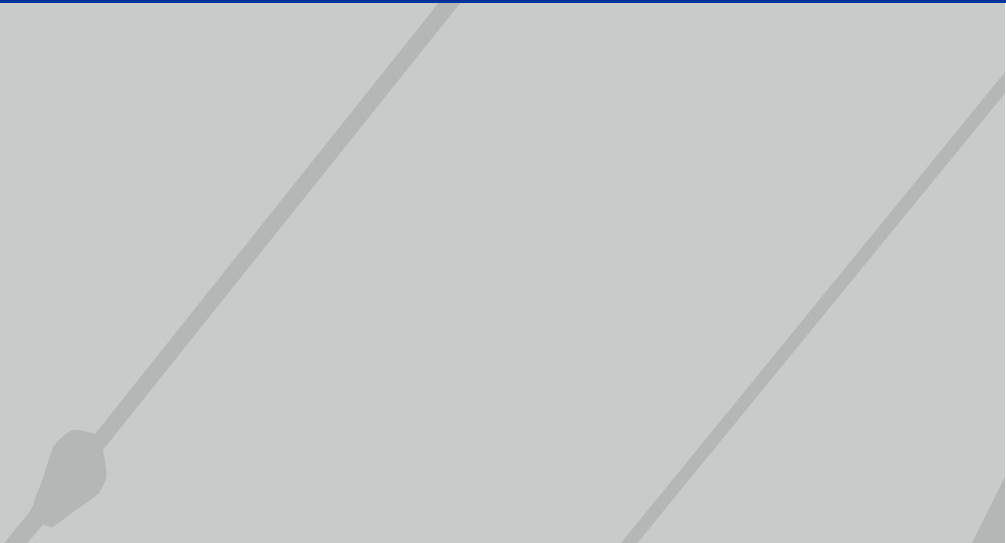

Note: This catalog may contain photographs of machines with specifications, attachments and optional equipment not certified for operation in your country. Please consult KOBELCO for those items you may require. Due to our policy of continual product improvements all designs and specifications are subject to change without advance notice.

Copyright by KOBELCO CRANES CO., LTD. No part of this catalog may be reproduced in any manner without notice.

**KOBELCO CRANES CO., LTD.**

17-1, Higashigotanda 2-chome, Shinagawa-ku,Tokyo 141-8626 JAPAN  
Tel: +81-3-5789-2130 Fax: +81-3-5789-3372  
**URL: <http://www.kobelco-cranes.com/>**

Inquiries To: