





K 45 T

Technical data

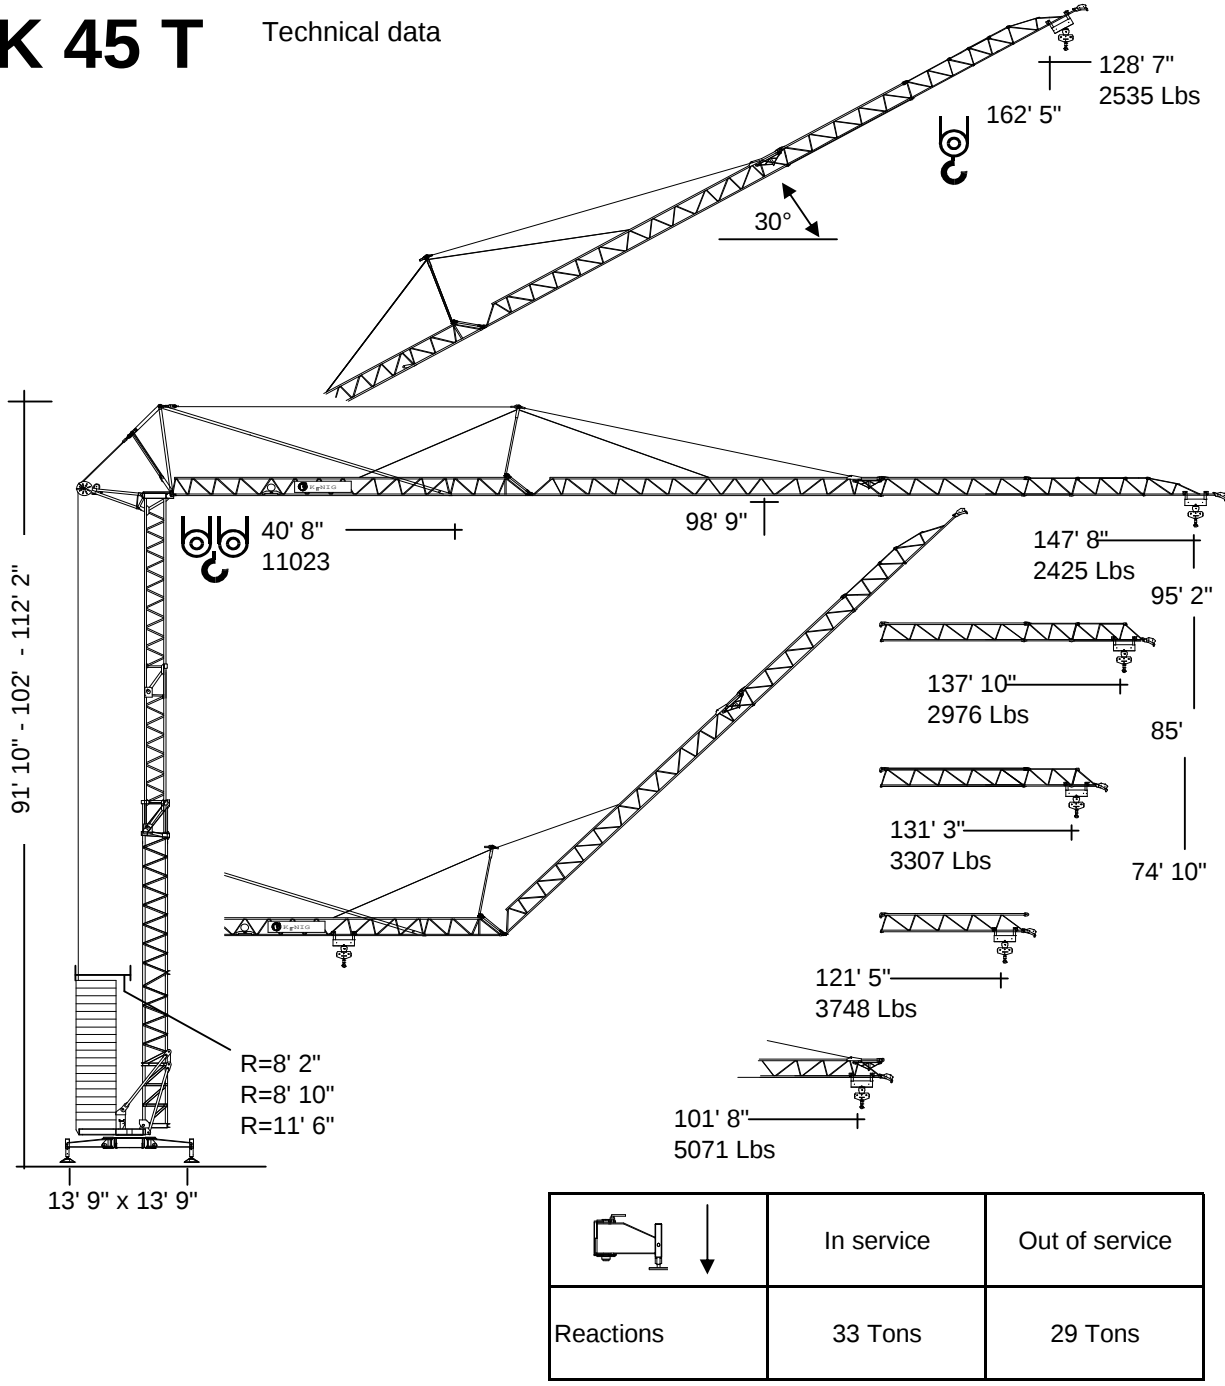

Transport by road

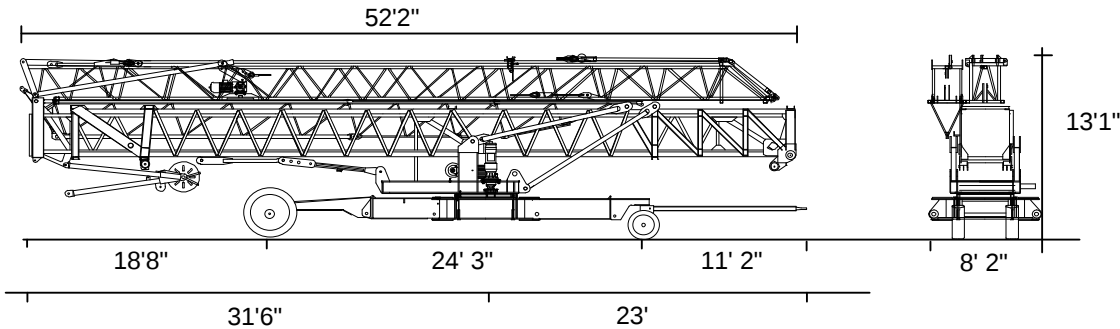



K 45 T

Technical data

Radius and capacity

Radius		Max. Capacity		ft x lbs											
Ft.	0°	T	Ft.	66	72	79	85	92	98	102	112	121	131	138	148
148		2.7	75	5512	5512	5247	4784	4387	4056	3902	3505	3197	2910	2756	2535
138		2.7	83	5512	5512	5512	5335	4916	4541	4365	3946	3571	3263	3086	
131		2.7	86	5512	5512	5512	5512	5137	4740	4564	4123	3748	3417		
121		2.7	88	5512	5512	5512	5512	5291	4894	4718	4255	3858			
102		2.7	96	5512	5512	5512	5512	5512	5379	5181					
30°		Radius		58	63	69	74	80	86	89	97	106	114	120	128
30°		Hook Height		121	125	128	131	134	138	139	144	149	154	157	162

Radius		Max. Capacity		ft x lbs											
Ft.	0°	T	Ft.	43	52	62	72	82	92	102	112	121	131	138	147
148		2.7	73	5512	5512	5512	5512	4894	4277	3792	3395	3086	2800	2645	2425
		5.5	41	10604	8267	6746	5688	4894	4277	3792	3395	3086	2800	2645	2425
138		2.7	80	5512	5512	5512	5512	5489	4806	4255	3836	3461	3152	2976	
		5.5	45	11023	9215	7539	6349	5489	4806	4255	3836	3461	3152	2976	
131		2.7	83	5512	5512	5512	5512	5512	5026	4453	4012	3637	3307		
		5.5	46	11023	9634	7870	6636	5732	5026	4453	4012	3637	3307		
121		2.7	86	5512	5512	5512	5512	5512	5781	4607	4145	3748			
		5.5	47	11023	9943	8135	6856	5908	5181	4607	4145	3748			
102		2.7	93	5512	5512	5512	5512	5512	5512	5070					
		5.5	51	11023	10891	8906	7517	6506	5710	5070					

Speeds

	Stufe	Step	Cran	m/min.	kg	kW
		1		21-10	5512-11023	3.75
		2		85-43	5512-11023	15
		3		171-85	2976-5952	17
				0 - 60		3.0
		0-0,8		sl./min.		2 x 3,0


Operation voltage
460 VFrequency
60 HzPower requirement
20,8 kVA (26 KW)Generator Requirement
60 KVA



K 45 T

Technical data

Erection

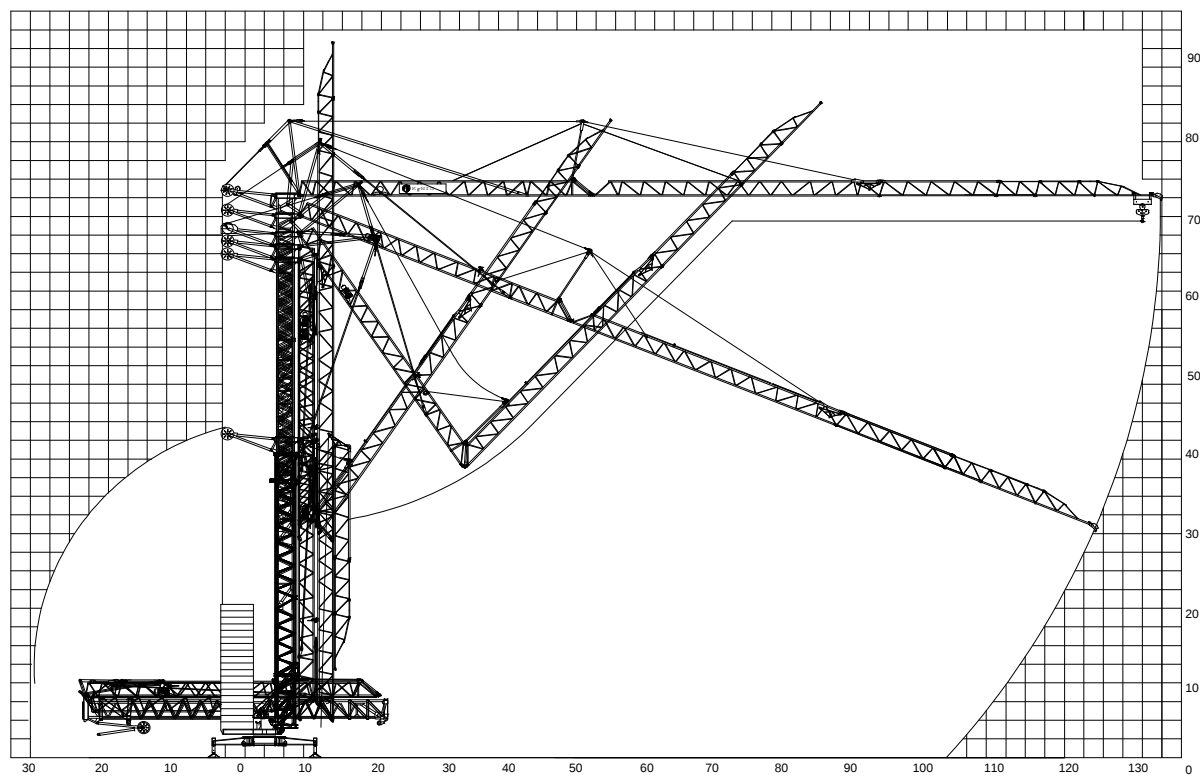

Weight

Dead weight approx.		18.6 Tons	Transport weight approx.	21.2 Tons
Counterweight	R=8' 10"	77620 Lbs		
	R=11' 5"	62000 Lbs		

KOENIG CRANES
North America

Bringing Innovation To Construction

Phone: 877-852-2192 Fax: 604-852-4421
Email: info@koenigcranes.com Internet: www.koenigcranes.com
All measurements and weights subject to alterations