



View thousands of Crane Specifications on [FreeCraneSpecs.com](https://www.FreeCraneSpecs.com)

GT50 / GT 55

Truck Mounted Forklift

PALFINGER



Simple, practical and productive choice for any sized fleet

The all new PALFINGER GT50 / GT55 Truck Mounted Forklift is the right choice for a larger fleet or a cost conscious buyer. The powerful 50 h.p. diesel engine, durable clear view mast, and conical chassis give the GT an excellent lift-to-weight ratio. With capacities up to 5,500 lbs, the machine can easily deliver a variety of building materials through the most rugged terrain.



Center-Seated Operator 57" Overhang Reliable and Efficient Innovative Design

PALFINGER Inc.
7942 Dorchester Rd.
Niagara Falls, ON L2E 6V6
Canada
Tel. 905-374-3363
Fax 905-374-1203
Toll Free 800-567-1554
www.palfinger-northamerica.com

GT50 / GT55
09.12

GT50 GT55 Truck Mounted Forklift




15" of Ground Clearance



Center-Seated Operator



57" Overhang

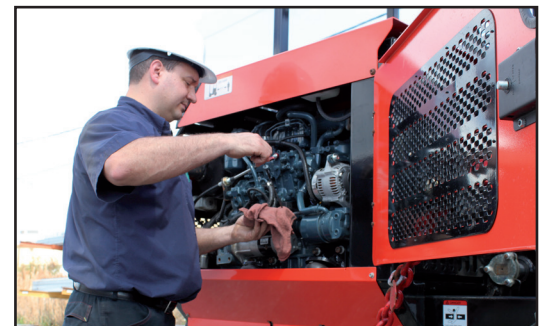

50 h.p. Diesel Engine

The innovative staggered frame design provides a lower center of gravity, improved stability and excellent ground clearance. Like all machines in the new GT-series, the GT50/55 offers a center-seated operator's position with a certified R.O.P.S. guard to provide the operator with an optimal view of the load and the job site.

Technical Specifications

GT50 Capacity at 24" Load Center	5,000 lbs	2,268 kg
GT55 Capacity at 24" Load Center	5,500 lbs	2,494 kg
Lift Height	120" / 144"	3048 mm / 3658 mm
Dead weight	5,875 lbs / 6,000 lbs	2,665 kg / 2,721 kg
Overhang from vehicle	57"	1,448 mm
Overall height	100" / 116"	2,540 mm / 2,946 mm
Overall width	100"	2,540 mm
Turning circle diameter	80"	2,032 mm
Tire size	31" x 15.5" - 15"	787mm x 394 mm - 392 mm
Fuel capacity	10 US gal	38 liter
Rate engine speed	2,600 rpm	
Max ground speed	7.5 mph	12.0 km/h
Working pressure	2,900 psi	200 bar
Steering	Hydrostatic	
Lighting system for transport	12 V	75 Ah
Theoretical gradability	30%	