






PK 16000

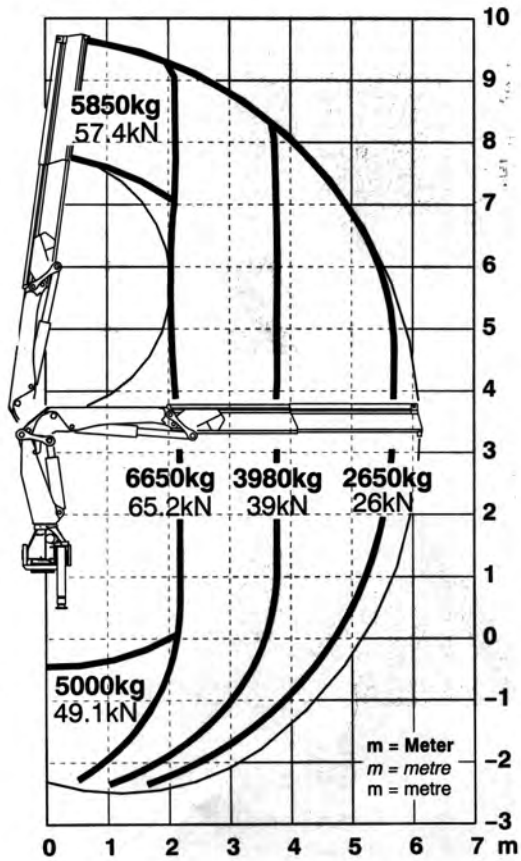


PK 16000 A

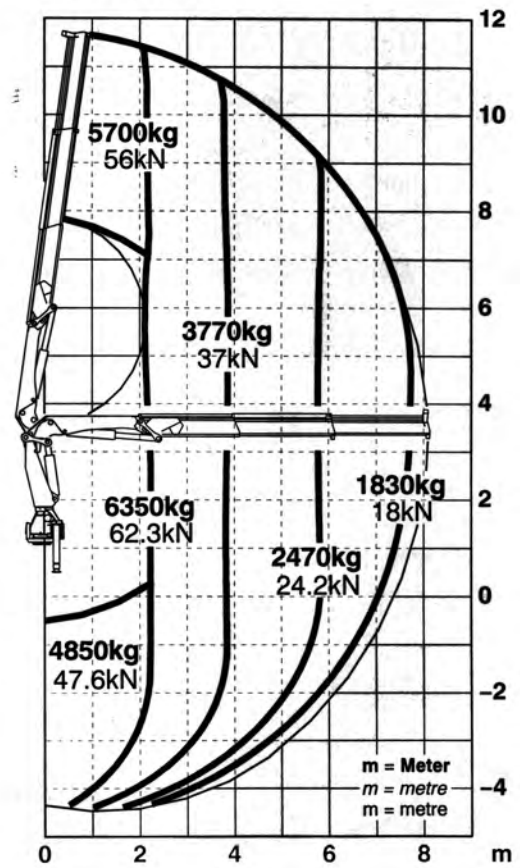

PK 16000 B





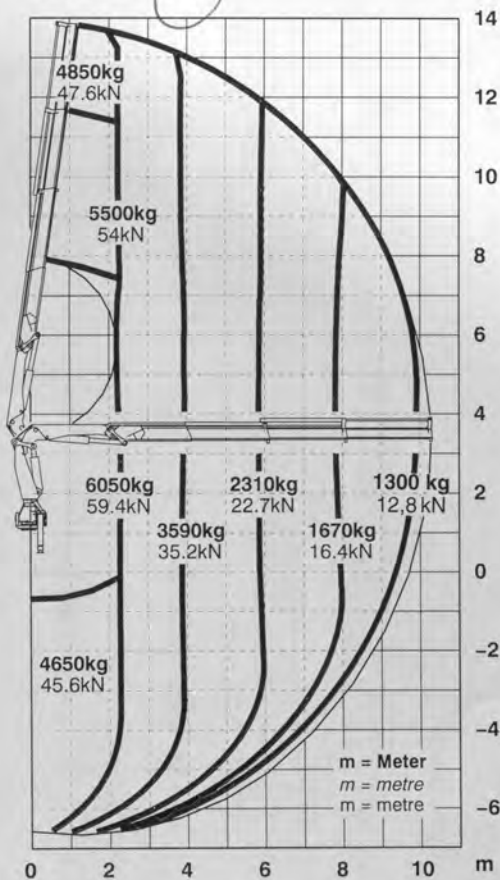


PK 16000 C

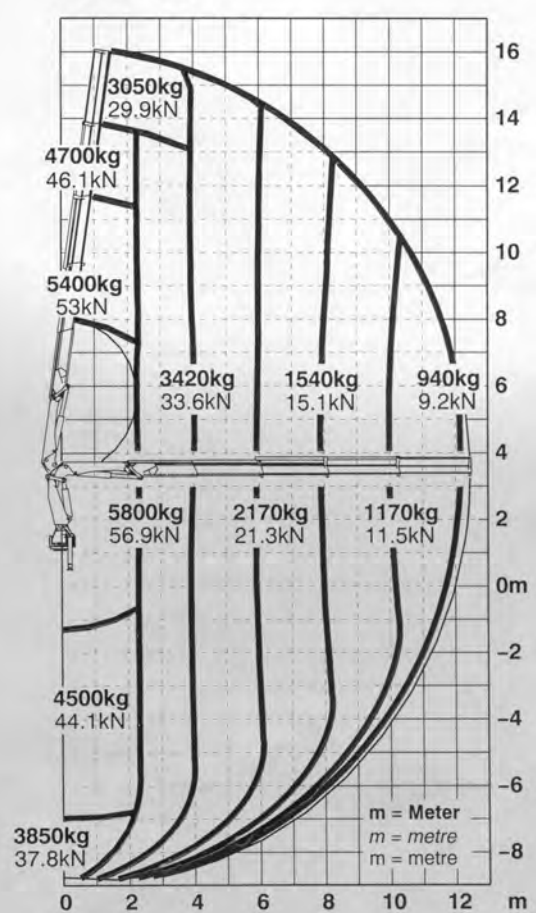



PK 16000 D

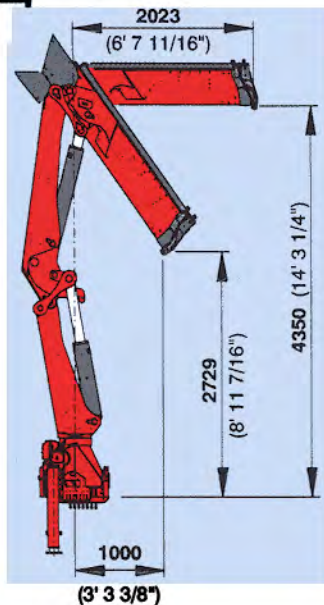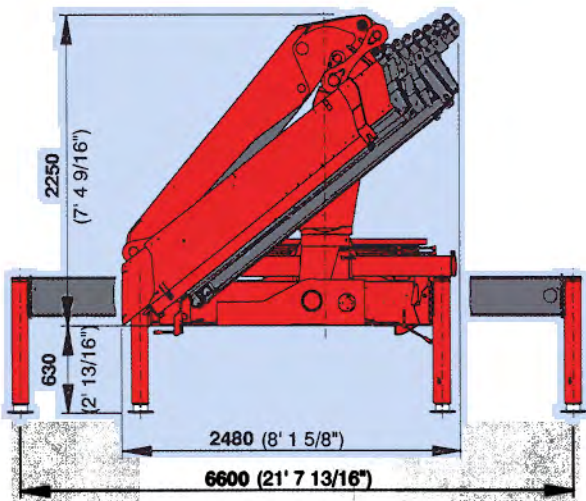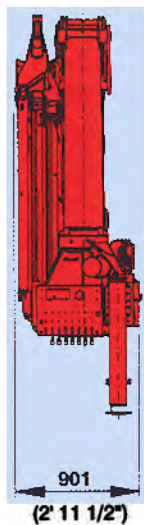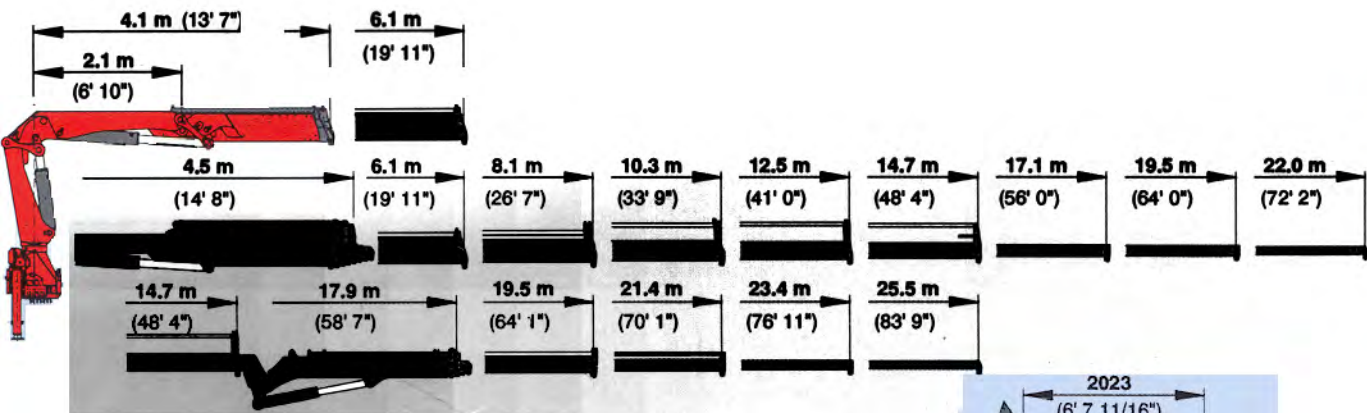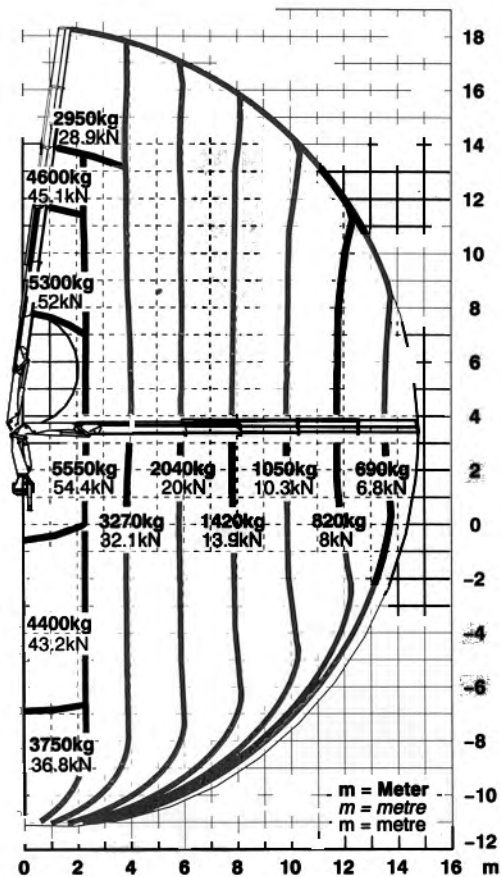



Maximale Hubkräfte:

Reichweite	Hubkraft
PK 16000	
hydraulisch	
2,2 m	65,2 kN / 6650 kg
3,8 m	39,0 kN / 3980 kg
5,7 m	26,0 kN / 2650 kg
PK 16000 A	
hydraulisch	
2,2 m	62,2 kN / 6350 kg
3,9 m	36,9 kN / 3770 kg
5,8 m	24,2 kN / 2470 kg
7,7 m	17,9 kN / 1830 kg
mechanisch	
9,8 m	13,4 kN / 1370 kg
12,0 m	10,3 kN / 1050 kg
14,3 m	8,0 kN / 820 kg
16,6 m	6,5 kN / 660 kg
19,0 m	5,1 kN / 520 kg
21,5 m	2,9 kN / 300 kg
PK 16000 B	
hydraulisch	
2,3 m	59,3 kN / 6050 kg

Reichweite	Hubkraft
3,9 m	35,2 kN / 3590 kg
5,9 m	22,6 kN / 2310 kg
7,8 m	16,4 kN / 1670 kg
9,9 m	12,7 kN / 1300 kg
mechanisch	
12,1 m	9,7 kN / 990 kg
14,4 m	7,6 kN / 780 kg
16,7 m	6,1 kN / 620 kg
19,1 m	5,0 kN / 510 kg
21,6 m	2,9 kN / 300 kg
PK 16000 C	
hydraulisch	
2,3 m	56,8 kN / 5800 kg
4,0 m	33,5 kN / 3420 kg
5,9 m	21,3 kN / 2170 kg
7,9 m	15,1 kN / 1540 kg
10,0 m	11,5 kN / 1170 kg
12,1 m	9,1 kN / 940 kg
mechanisch	
14,4 m	7,3 kN / 740 kg
16,7 m	5,8 kN / 590 kg

Reichweite	Hubkraft
19,2 m	4,7 kN / 480 kg
21,7 m	2,9 kN / 300 kg
PK 16000 D	
hydraulisch	
2,4 m	54,4 kN / 5550 kg
4,1 m	32,0 kN / 3270 kg
6,0 m	20,0 kN / 2040 kg
8,0 m	13,9 kN / 1420 kg
10,1 m	10,3 kN / 1050 kg
12,2 m	8,0 kN / 820 kg
14,4 m	6,8 kN / 690 kg
mechanisch	
16,7 m	5,4 kN / 550 kg
19,1 m	4,3 kN / 440 kg
21,6 m	2,9 kN / 300 kg

Die Reichweiten sind für 30° Hauptarmstellung angegeben und daher nicht die maximalen Werte.

