




DRAFT



TEREX | COMEDIL

- Gru a torre a braccio impennabile
- Luffing Jib Tower Crane • Grue à tour à flèche relevable
- Turmdrehkran mit Steilstellung-Ausleger
- Grúa torre de pluma abatible

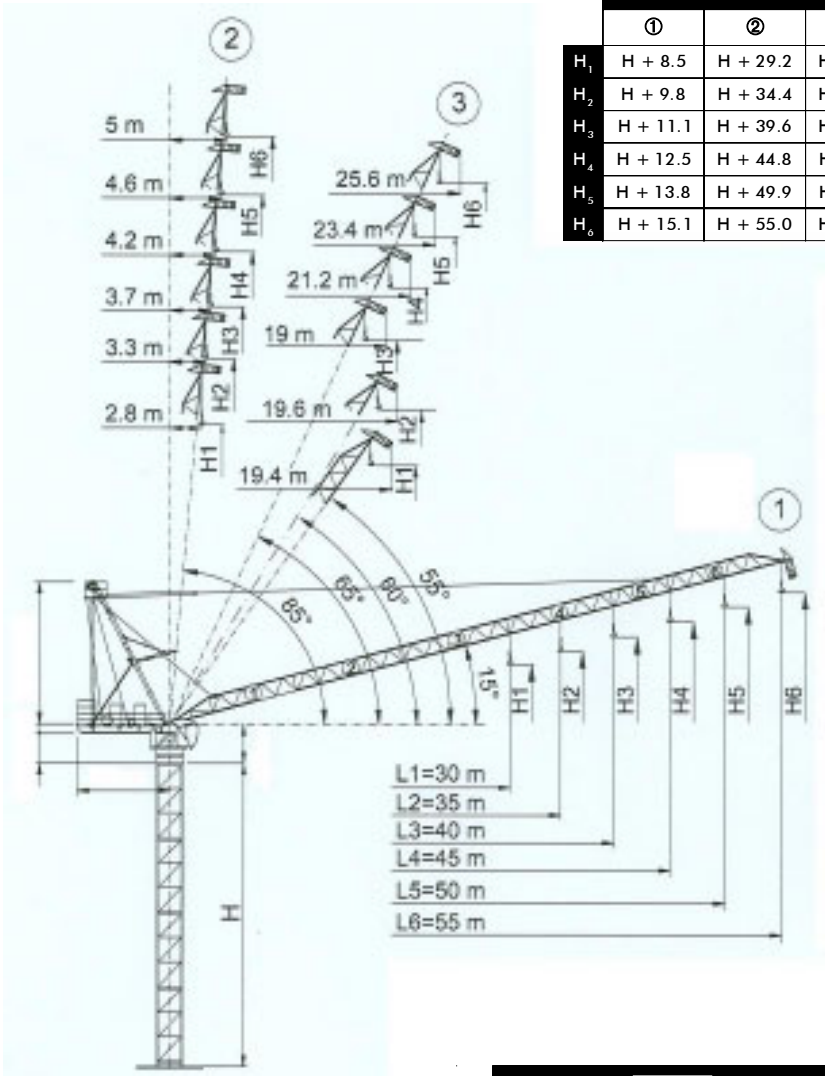

	H		
	①	②	③
H ₁	H + 8.5	H + 29.2	H + 23.7
H ₂	H + 9.8	H + 34.4	H + 29.6
H ₃	H + 11.1	H + 39.6	H + 35.8
H ₄	H + 12.5	H + 44.8	H + 40.5
H ₅	H + 13.8	H + 49.9	H + 45.2
H ₆	H + 15.1	H + 55.0	H + 49.9

H	Altezza torre	I
①	Sbraccio massimo	
②	Sbraccio minimo in servizio	
③	Sbraccio minimo in fuori servizio	
H	Tower height	GB
①	Maximum jib	
②	Minimum jib (in service)	
③	Minimum jib (out of service)	
H	Hauteur mât	F
①	Portée maxi.	
②	Portée min. en service	
③	Portée min. hors service	
H	Turmhöhe	D
①	Max. Ausleger	
②	Mindst. Ausleger in Betrieb	
③	Mindst. Ausleger außer Betrieb	
H	Altura torre	E
①	Pluma maxima	
②	Pluma minima en servicio	
③	Pluma minima fuera de servicio	

CE FEM 1.001 A3

L ₁	(30 m)	= 1 + 2 + 6
L ₂	(35 m)	= 1 + 2 + 5 + 6
L ₃	(40 m)	= 1 + 2 + 3 + 6
L ₄	(45 m)	= 1 + 2 + 3 + 5 + 6
L ₅	(50 m)	= 1 + 2 + 3 + 4 + 6
L ₆	(55 m)	= 1 + 2 + 3 + 4 + 5 + 6

CTL 260-18 H20

Dati illustrativi non impegnativi
Con riserva di modifica senza preavviso

Angaben und Beschreibung unverbindlich
Änderungen vorbehalten ohne weitere Mitteilung

Specifications and data not binding
Subject to modification without notice

Dibujos y datos sin compromiso
Modificaciones reservadas sin preaviso

Données techniques seulement indicatives
Modifications réservées sans préavis

UTE.DOC.REV.001



COMEDIL

DRAFT

CTL 260-18

Diagramma di portata
Load Diagram

I
GB

Courbes de charges
Lastkurven

F
D

Curvas de cargas

E

CTL 260-18

 9 t	 13.5 t	 18 t		m	15	20	25	30	35	40	45	50	55
9 t	13.5 t	18 t	-	28.4 m	9.00	9.00	9.00	8.36	6.71	5.47	4.50	3.73	3.10
9 t	13.5 t	18 t	-	20.4 m	13.5	13.5	10.45	8.14	6.50	5.26	4.30	3.53	2.90
9 t	13.5 t	18 t	-	31.9 m	9.00	9.00	9.00	9.00	7.92	6.54	5.46	4.60	
9 t	13.5 t	18 t	-	22.6 m	13.5	13.5	11.91	9.34	7.50	6.13	5.05	4.20	*
9 t	13.5 t	18 t	-	17.9 m	18.0	15.76	11.91	9.34	7.50	6.13	5.05	4.20	
9 t	13.5 t	18 t	-	32.8 m	9.00	9.00	9.00	9.00	8.28	6.88	5.80		
9 t	13.5 t	18 t	-	23.2 m	13.5	13.5	12.3	9.71	7.86	6.48	5.40	*	
9 t	13.5 t	18 t	-	18.2 m	18.0	16.19	12.3	9.71	7.86	6.48	5.40		
9 t	13.5 t	18 t	-	33.7 m	9.00	9.00	9.00	9.00	8.60	7.20			
9 t	13.5 t	18 t	-	23.7 m	13.5	13.5	12.64	10.04	8.19	6.80	*		
9 t	13.5 t	18 t	-	18.5 m	18.0	16.54	12.64	10.04	8.19	6.80			
9 t	13.5 t	18 t	-	34.0 m	9.00	9.00	9.00	9.00	8.70				
9 t	13.5 t	18 t	-	23.8 m	13.5	13.5	12.7	10.13	8.30	*			
9 t	13.5 t	18 t	-	18.6 m	18.0	16.55	12.7	10.13	8.30				
9 t	13.5 t	18 t	-	30.0 m	9.00	9.00	9.00	9.00					
9 t	13.5 t	18 t	-	23.9 m	13.5	13.5	12.77	10.2	*				
9 t	13.5 t	18 t	-	18.7 m	18.0	16.63	12.77	10.2					

* = + 200 kg [ -  50 m - 45 m - 40 m - 35 m - 30 m]

Altre installazioni
Other configurations


I
GB

Autres implantations
Aufstellmöglichkeiten

F
D

Otras implantaciones


E

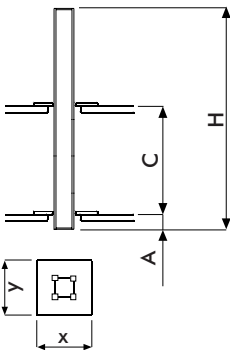

i

Gru climbing
Bottom climbing crane
Télescopage sur dalles
Kletterkran im Gebäude
Grúa trepadora

I
GB
F
D
E

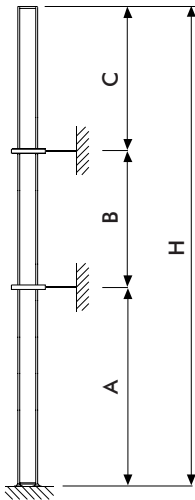

i

Gru ancorata
Crane tied to the structure
Grue ancrée
Geankerter Kran
Grúa anclada

I
GB
F
D
E

H20 RTL			
[m]			
	L ₁₋₂₋₃	L ₄₋₅	L ₆
A _{min/max}	25/35	25/32	25/28
B _{min/max}	18/26	18/22	18/22
C _{max}	29	27	25
H _{max}	i		

i

Consultateci

I

Consult us

GB

Nous consulter

F

Auf Anfrage

D

Consultarnos

E



TEREX | COMEDIL

DRAFT

CTL 260-18

Torre
Tower

I
GB



Tour
Turm

F
D


Torre

E

H20

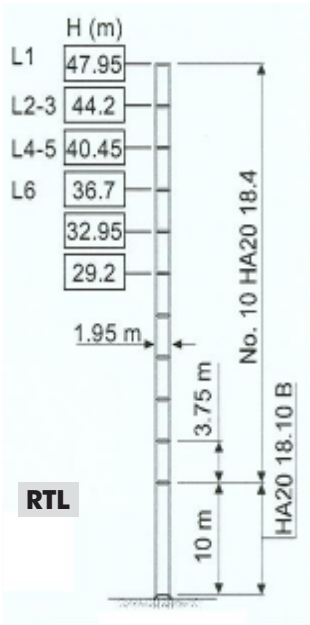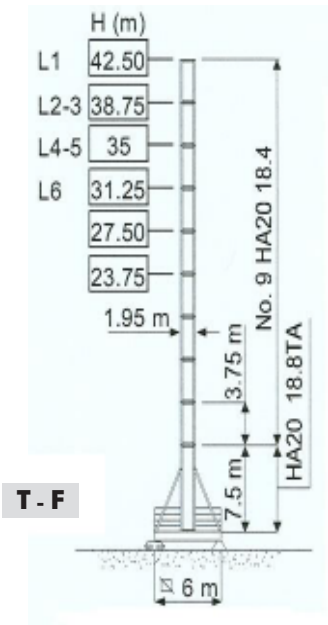

H20/HD23

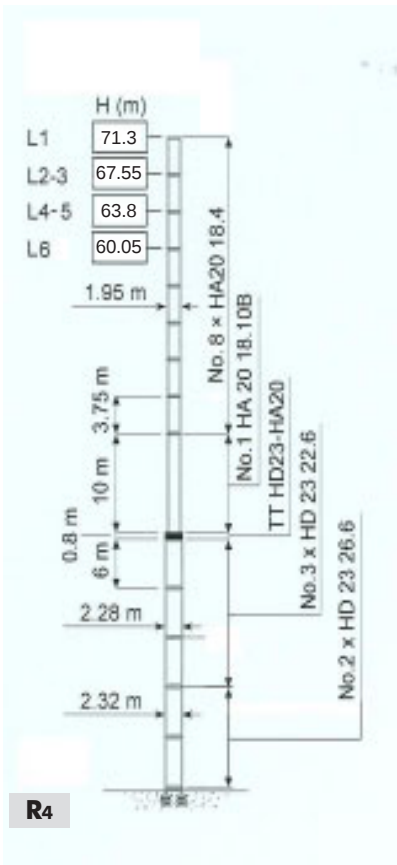

H Altezza torre

I

H Tower height

GB

H Hauteur mât

F

H Turmhöhe

D

H Altura torre

E



DRAFT

<

Gru Comedil s.r.l.

A Terex Company
Via S. Egidio 42/A, 33074 Fontanafredda (PN) - Italy
Tel. (+39) 0434 567 311 - Telefax (+39) 0434 998631
Internet e-mail: info@comedil.com
Internet home page: www.comedil.com

Divisione Automontanti

Via Alessandrina, 25 - 20095 Cusano Milanino (MI) - Italy
Tel. (+39) 02 613 16011 - Telefax (+39) 02 613 16034
Internet e-mail: info.CBR@comedil.com