







## VALLA 35 E MOBILE CRANE MAX CAPACITY 3,5 t



**DRIVE:** DC 3.3 kW - 24 V fanned reversible electric motor with MOSFET electronic control HF and energy saving, self diagnostic, speed and temperature checks (no. 2 thermostasts), brush wear warning. Foot hydraulically operated brake to drive wheel. Hand brake mechanically operated. Gear box between motor and drive wheel in oil bath. Speed up to 8 km/h.

**STEERING:** power steering with hydraulic motor and gear 180° (Orbitrol system). Safety valves and filter.

BATTERY: 575 Ah - 24 V. Battery meter on dashboard.

**CRANE FRAME:** fabricated from preformed and welded steel plate with built-in counterweight.

**WHEELS:** rear 1 solid tires 18 x 7 x 8"; front 4 solid tires 15 x  $4_{1/2}$  x 8".

**BOOM:** fabricated from preformed and welded steel plate with 3 hydraulic telescoping sections fitted with adjustable nylon wear pads.

HYDRAULIC SYSTEM: in own enclosed circuit powered by a 2,5 kW - 24 V motor driven pump through two self cancelling control valves, lever operated, 1 for boom raise and lower, 1 for boom extension and retraction. Fitted with safety valves and filters. Maximum hydraulic pressure 180 Bar.

**DRIVER'S OVERHEAD GUARD:** a steel frame over driver's seat allowing full visibility with metal checker plate overhead.


WEIGHT: 3.000 Kg.

OPTIONAL EXTRAS: L.M.I. (Electronic Load Moment Indicator), manual boom extension, man bucket, remote control, canvas cab, hydraulic winch, hydraulic chain hoist, carry deck, battery, battery charger, non-marking tires.



Via Piacenza, 45 - 29010 Calendasco - Piacenza - ITALIA Tel. 0039 0523 762025 - 762004 - Fax 0039 0523 760531 Internet: www.valla.com - email: info@valla.com



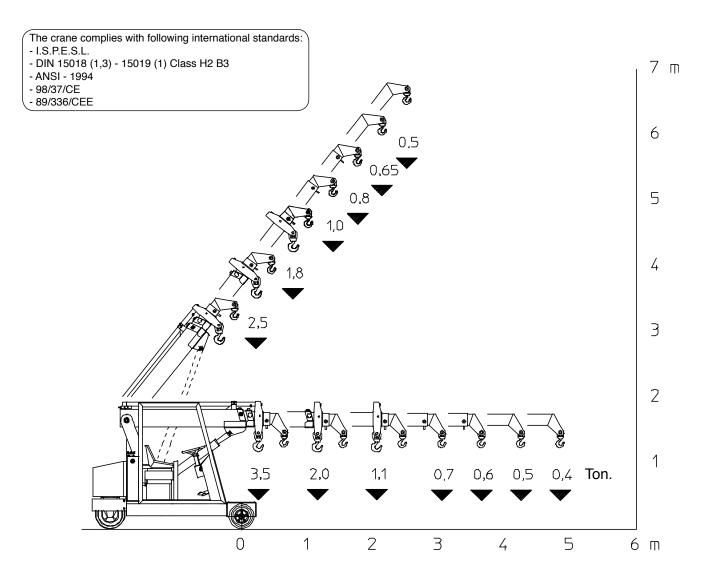

**VALLA MODEL 35 E** 

